


LW-Series LED-backlit Display 24" | 22"



The LW-Series is crafted with eye comfort and daily usage requirements taken into full account. Multiple connectivity options—DisplayPort, HDMI, and VGA—enable a wealth of multimedia applications and flexibility of connections. Coming with an outstanding contrast ratio and colour performance, it promises to bring visual enjoyment both at the workplace and in the home.





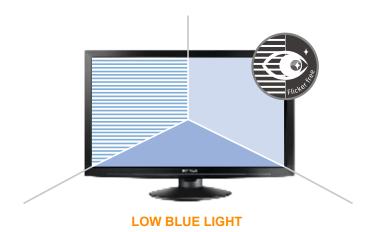


Eye Comfort

Eye comfort figures high on the list of strengths that define the LW-Series. The flicker-free backlight and blue light filter of the LW-Series ensure a comfortable viewing experience by reducing eyestrain after long periods of use.

Flexible Connectivity and Multimedia Options

Connectivity versatility brings immense flexibility. Given its HDMI, DisplayPort, and VGA input options, you can easily connect an LW-Series display to your current or older peripherals, like PCs, laptops, or media players at the workplace and in the home.





Audiovisual Multimedia Enjoyment

A 20,000,000:1 contrast ratio, precise colour temperature and preset picture mode settings for reading texts, browsing webpages, or watching videos make the LW-Series a competent multimedia platform. Whether watching videos or listening to music, you can either count on its built-in speakers or plug in your earphones.

Features

- Full HD 1920 x 1080 resolution
- Blue-light filter and Flicker-free display technology reduces eye discomfort
- Versatile connectivity: DisplayPort, HDMI, VGA
- Crisp 20,000,000:1 dynamic contrast ratio
- VESA mount compatibility for flexible installation









Specifications		LW-24E	LW-22E
Panel	Panel Type Panel Size Max. Resolution Pixel Pitch Brightness Contrast Ratio Viewing Angle (H/V) Display Colour Response Time	LED-Backlit TFT LCD (TN Technology) 23.5" FHD 1920 x 1080 0.272 mm 250 cd/m² 20,000,000:1 (DCR) 170°/160° 16.7M 3 ms	LED-Backlit TFT LCD (TN Technology) 21.5" FHD 1920 x 1080 0.248 mm 250 cd/m ² 20,000,000:1 (DCR) 170°/160° 16.7M 3 ms
Frequency (H/V)	H Freq. V Freq.	30 kHz-95 kHz 48 Hz-76 Hz	30 kHz-95 kHz 48 Hz-76 Hz
Input	DisplayPort HDMI VGA Audio In	x 1 1.4 x 1 15-Pin D-Sub x 1 Stereo Audio Jack (3.5 mm)	x 1 1.4 x 1 15-Pin D-Sub x 1 Stereo Audio Jack (3.5 mm)
	Audio Out Internal Speakers	Stereo Audio Jack (3.5 mm) 2W x 2	Stereo Audio Jack (3.5 mm) 2W x 2
Power	Power Supply Power Requirement On Mode Stand-by Mode Off Mode	Internal AC 100-240V, 50/60 Hz 19W (On) < 0.5W < 0.5W	Internal AC 100-240V, 50/60 Hz 19W (On) < 0.5W < 0.5W
Operating Conditions	Temperature Humidity	0°C-40°C (32°F-104°F) 10%-85% (non-condensing)	0°C-40°C (32°F-104°F) 10%-85% (non-condensing)
Storage Conditions	Temperature Humidity	-25°C-55°C (-13°F-131°F) 10%-85% (non-condensing)	-25°C-55°C (-13°F-131°F) 10%-85% (non-condensing)
Mounting	VESA FPMPMI	Yes (100 x 100 mm)	Yes (100 x 100 mm)
Stand	Tilt	-4° to 20°	-5° to 18°
Security	Kensington Security Slot	Yes	Yes
Dimensions	w/Base (W x H x D) Packaging (W x H x D)	566.0 x 395.0 x 190.0 mm (22.3" x 15.6." x 7.5") 622.0 x 423.0 x 130.0 mm (24.5" x 16.7" x 5.1")	505.6 x 366.0 x 180.0 mm (19.9" x 14.4" x 7.1") 558.0 x 374.0 x 124.0 mm (22.0" x 14.7" x 4.9")
Weight	w/Base Packaging	3.6 kg (7.9 lb) 5.2 kg (11.4 lb)	3.1 kg (6.8 lb) 4.4 kg (9.7 lb)
Regulation Approval	Certification & Compliance	FCC, CE, CB, BSMI, WEEE, RoHS, REACH, EAC	FCC, CE, CB, BSMI, WEEE, RoHS, REACH, EAC
Accessories	Supplied	Power Cord, VGA Cable, Audio Cable, Quick Start Guide, Warranty Card	Power Cord, VGA Cable, Audio Cable, Quick Start Guide, Warranty Card
Optional Accessories		Wall Mount: PMK-01 Desk Mounts: DMC-01, DMC-02D, DMS-01D, DMS-01Q, ES-02 Ceiling Mount (Landscape only): CMP-01 + WMK-03 Wall Mounts (Landscape only): WMA-01, WMK-01,	Wall Mount: PMK-01 Desk Mounts: DMC-01, DMC-02D, DMS-01D, DMS-01Q, ES-02 Ceiling Mount (Landscape only): CMP-01 + WMK-03 Wall Mounts (Landscape only): WMA-01, WMK-01,





WMK-03

WMK-03

Global Headquarters

Taipei, Taiwan

EMEA Regional Headquarters

Capelle a/d Ijssel, The Netherlands

North & South America Regional Headquarters

San Jose, CA, U.S.A.

Asia-Pacific Regional Headquarters

Taipei, Taiwan

Canada Sales Office

Vancouver, B.C., Canada

China Sales Office

Shanghai, China

Czech Republic Sales Office

Brno, Czech Republic

Denmark Sales Office

Støvring, Denmark

Germany Sales Office

Mechernich, Germany

Italy Sales Office

Livorno, Italy

Poland Sales Office

Warsaw, Poland

Spain Sales Office

Barcelona, Spain

Ukraine Sales Office

Lviv, Ukraine

displays.agneovo.com

