



7		8		9		
ITEM		ECN/FN NO.		POSITION		REVISION LIST
						DESCRIPTION
						DATE
						UPDATED BY
						APPROVED BY

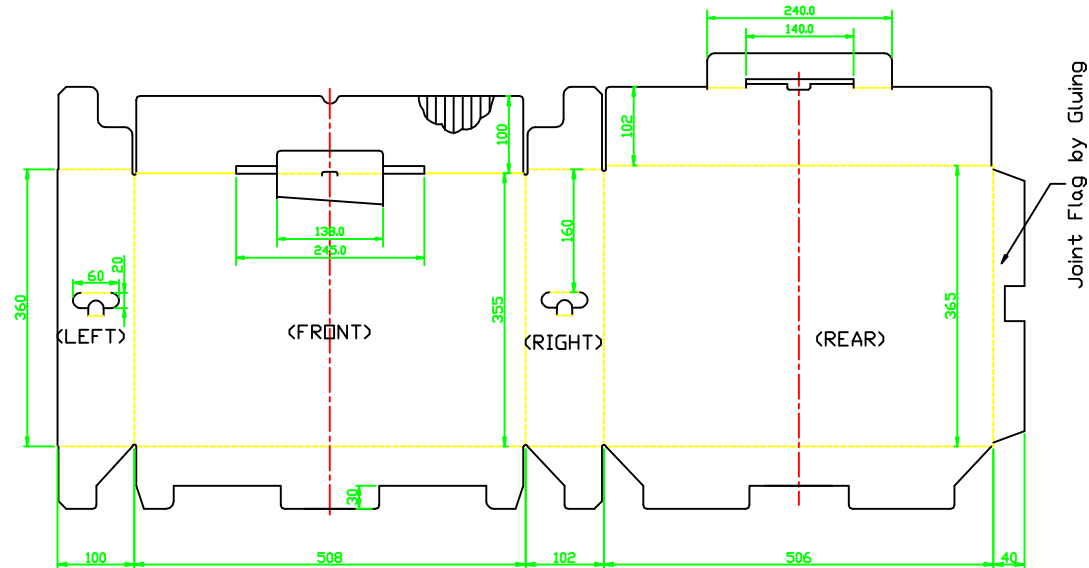

NOTE:

- 1.MATERIAL:DOUBLE WALL CORRUGATED FIBERBOARD "BE" FLUTE.
- 2.BURSTING STRENGTH 14kgf/cm²
- 3.COMPRESSION STRENGTH:(200)KGF.
- 4.TOLERANCE $\pm\frac{2}{0}$ UNLESS OTHERWISE SPECIFIED.
- 5.COLOR:ORIGINAL.
- 6." ————— "CUT LINE.
" - - - - - "SCORED LINE.
- 7.Doggy door pull out strength:1.5kgf<N<3.5kgf
- 8.Pull:600kgf



INSIDE DIMENSION:
503(L)x97(W)x345(H)
SCORELINE DIMENSION:
508(L)x102(W)x365(H)
OUTSIDE DIMENSION:
513(L)x107(W)x370(H)

TOLERANCE UNLESS OTHERWISE SPECIFIED (mm)				
RANGE OF DIM.	CUSHION	CARTON	WALL THICKNESS	CUSHION
<100	+0/-2	+2/-0	<25	+2/-0
<400	+0/-2	+2/-0	>25	+2/-0
400-600	+0/-2	+2/-0		
600-800	+0/-2	+2/-0		
800-1000	+0/-2	+2/-0		

MODEL: AOC 12080SW for WW		PROJ 3D:		PROJ 2D:	
UNIT MM		TOLERANCES UNLESS OTHERWISE STATED		DIMENSIONS ANGLE	
SCALE 1/1		3rd PROJ.		TREATMENT	
DRAWN Chengrongzhou		DATE 20150210		F44G9F11624-1A 水印牛皮黄	
CHECK:		DATE:		TPV Technology Ltd.	
				110 1-1 A4	
				FQ INT	

COMPLY WITH
RoHS