

DHI-LM22-B200S 21.45" FHD Monitor



Features:

- · Light and cost-effective plastic housing;
- · Ultra-narrow bezel , elegant appearance, metal base;
- 178°H/178°V extra-wide viewing angle for overall viewing performance;
- · High fidelity digital processing for a brilliant and vivid video;
- · Support multiple signal inputs such as HDMI, VGA;
- · Physical button control mode;
- · Low energy consumption, long service life;
- · Anti-blue light design,eye-protective.



icennical opeenica	
Model	
Model	DHI-LM22-B200S
Display	
Screen Size	21.45"
Panel type	VA
Aspect Ratio	16:9
Resolution	1920×1080 (FHD)
Backlight	LED
Brightness/Luminance	250 cd/ ㎡ (max)
Contrast	3000:1
Display Color	16.7M(8bit)
Viewing Angle(H/V)	178°(H)/178°(V)
Response time(typ.)	OD 5ms
Refresh Rate	100Hz (max)
Signals	
Input	VGA×1, HDMI×1
Output	NO

General			
Power Supply	DC 12V		
Consumption (Standard)	22W		
Consumption (Standby)	≤0.5W		
Net Weight	2.18kg (4.8lb)		
Gross Weight	3.12 kg (6.9lb)		
Bezel Width	3.3mm(U/R/L) 15.2mm(B)		
Wall Mount	NA		
Dimension with stand (W×H×D)	492.7x284.0x39.5mm (20"x11.2"x1.6")		
Package(W×H×D)	598x99x366mm (23.6"x4.0"x14.5")		
Work Environment	Temperature	0°C~40°C (32°F~104°F)	
Work Environment	Humidity	10%~85%	
Accessory			
Standard	HDMI cable, Adapter, base		
Certifications			
Certifications	CE/FCC		

Speaker

Technical Specification


Speaker		1Wx2	
Rev 002.000	© 2022 Dahua. All rights	s reserved. Design and specifications are subject to change without notice.	

The images, specifications and information mentioned in the document are only for reference, and might differ from the actual product



Dimensions(mm)

Æ

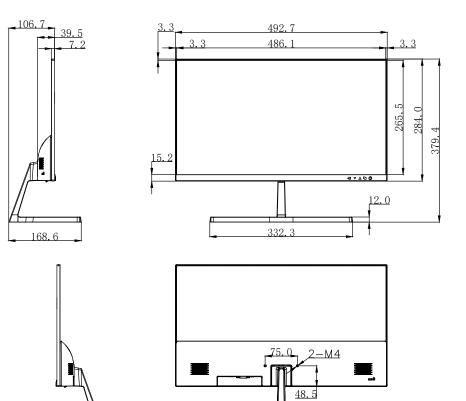

Г

Rev 002.000 © 2022 Dahua. All rights reserved. Design and specifications are subject to change without notice. The images, specifications and information mentioned in the document are only for reference, and might differ from the actual product.

www.dahuasecurity.com