



#### 17" Projective Capacitive 10pt touch screen

The ProLite T1732MSC 17" multi-touch screen is based on projected capacitive technology which thanks to a glass overlay covering the screen guarantees high durability, scratch-resistance and perfect picture performance. The touch function remains unaffected even if the glass is scratched. A solid and steady base supports the TouchScreen with an adjustable stand offering full 90 degree positioning angles. Menu Buttons are located on the side of the screen which can be locked to prevent tampering and includes a handy function to deactivate the TouchScreen for cleaning. In addition the edge-to-edge glass design creates an eye-catching finish with high light transmission guaranteeing perfect picture clarity and brilliant colours.

Available in black and white.



#### TOUCH TECHNOLOGY - CAPACITIVE

This technology uses a sensor-grid of micro-fine wires integrated into the glass that covers the screen. Touch is detected because electrical characteristics of the sensor grid change when human finger is placed on the glass. Thanks to the glass overlay this technology is highly durable, and the touch function remains unaffected even if the glass is scratched. It offers perfect picture performance and will work with human finger (also latex gloved) and stylus-pen.



#### IP54

The IP Code classifies how resistant a device is to foreign objects and moisture. IP54 means that the monitor will operate in dusty conditions, and will resist splashing water.

|                     |  |
|---------------------|--|
| DIAGONAL            | 17"; 43cm  |
| ASPECT RATIO        | 5 : 4  |
| PANEL               | TN LED   |
| NATIVE RESOLUTION   | 1280 x 1024 ( 1.3 megapixel)   |
| BRIGHTNESS          | 250 cd/m² typical  |
| BRIGHTNESS          | 225 cd/m² with touch panel   |
| CONTRAST            | 1 000 : 1 with touch panel   |
| RESPONSE TIME       | 5 ms   |
| VIEWING ZONE        | horizontal/vertical: 160° / 160° ; right/left: 80° / 80° ; up/down: 80° / 80°  |
| DISPLAY COLOUR      | 16.7 million   |
| TOUCHTECHNOLOGY     | projective capacitive, multi touch (10 compatible touch points - supported only under Windows® 7/8), activated by finger |
| TOUCH POINTS        | 10   |
| GLASS HARDNESS      | 7H minimum   |
| LIGHT TRANSMITTANCE | 90%  |
| DISPLAY AREA H X W  | 270.5 x 338 mm; 10.6" x 13.3"  |
| PIXEL PITCH H X V   | 0.264 x 0.264 mm   |
| HORIZONTAL SYNC     | 31,4 - 80 KHz  |
| VERTICAL SYNC       | 56 - 75 Hz   |
| SYNCHRONIZATION     | Separate Sync  |

## 2. INTERFACES & CONNECTORS

|                         |             |
|-------------------------|-------------|
| ANALOG INPUT CONNECTOR  | VGA         |
| DIGITAL INPUT CONNECTOR | DVI         |
| CONTROLS                | USB (touch) |

## 3. FEATURES

|                           |  |
|---------------------------|--|
| CONTROLS                  | On-Screen-Display in 8 languages (DE, EN, ES, FR, IT, JP, Chinese - traditional and simplified) and 5 front controls (Menu, Scroll up/ Brightness, Scroll down/ Mute, Select/ Auto, Power) |
| USER CONTROLS             | contrast, brightness, auto adjust, H.position, V.position, H.size, phase, OSD H.position, OSD V.position, OSD timeout, reset, input select, OSD language, colour temperature, volume, mute |
| SPEAKERS                  | 2 x 1 W (Stereo)   |
| ANTI-THEFT-DEVICE         | Kensington-lock™ prepared  |
| REGULATIONS               | CE, CB, TÜV-Bauart, VCCI, GOST-R   |
| TILT ANGLE                | 90° up; 5° down  |
| VESA MOUNTING             | 100 x 100 mm   |
| COLOUR                    | Black  |
| WATER AND DUST PROTECTION | IP54   |

## 4. ACCESSORIES


|                      |   |
|----------------------|---|
| DRIVER               | multi-touch: Windows7/8 (HID compliant), single-touch: Vista, XP, 9X, 2000, CE, NT4), Linux, Mac (OSX)  |
| INCLUDED ACCESSORIES | power cable, VGA signal cable, DVI signal cable, audio cable, USB cable, Touch Panel Driver Disk (CD-ROM), screw, quick start guide, safety guide |

## 5. POWER MANAGEMENT

|                   |   |
|-------------------|---|
| POWER SUPPLY      | AC 100 - 240 V, 50 / 60 Hz                      |
| POWER SUPPLY UNIT | internal  |
| POWER USAGE       | 25 W typical; max. 2 W in Power management mode |
| POWER MANAGEMENT  | VESA DPMS                                       |

## 6. DIMENSIONS & WEIGHT

|                      |                    |
|----------------------|--------------------|
| DIMENSIONS W X H X D | 387 x 342 x 202 mm |
| WEIGHT               | 5.6 kg             |

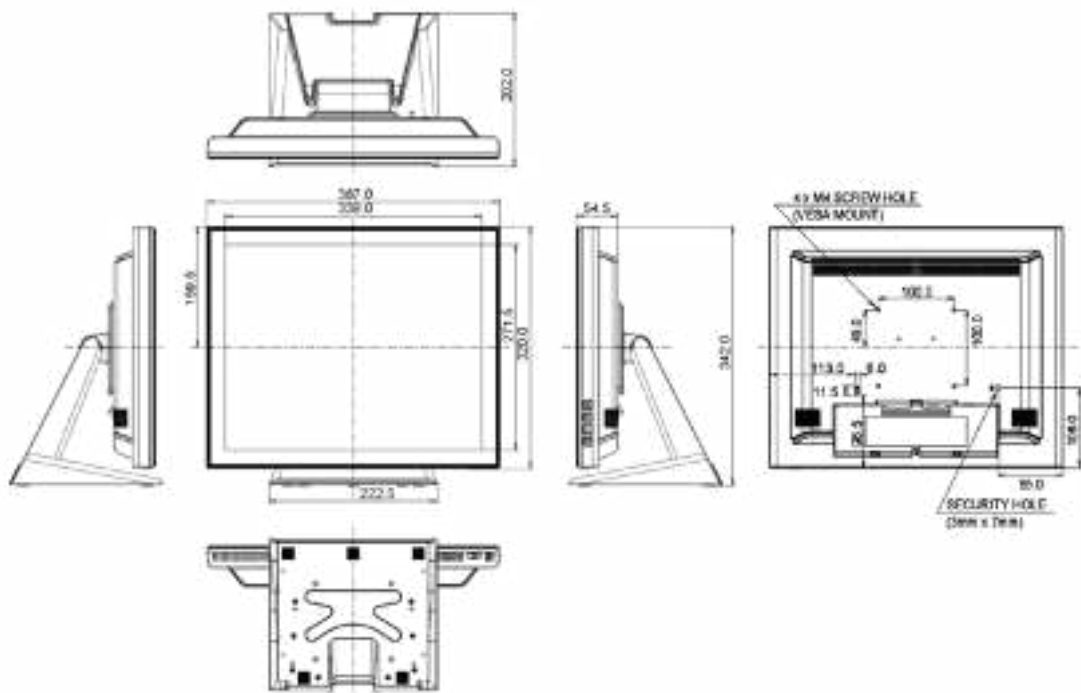

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.