



24" IPS monitor with ultra-slim bezel and ultra-flat front

Stylish edge-to-edge design makes the ProLite XU2493HSU perfect for multi-monitor set-ups. The IPS panel technology offers accurate and consistent colour reproduction with wide viewing angles. High contrast and brightness values mean the monitor will provide excellent performance for photographic and web design.

Available also with height adjustable stand: [ProLite XUB2493HS-B1 \(1920x1080\)](#) and [ProLite XUB2493HSU-B1 \(1920x1080\)](#)



IPS Technology

IPS technology offers higher contrast, darker blacks and much better viewing angles than standard TN technology. The screen will look good no matter from what angle you look at it.



Flicker-free + Blue light

The ultimate solution for the comfort and health of your eyes. Flicker-free monitors with the blue light reducer function substantially reduce the strain and fatigue caused by flickering and blue light emittance of regular monitors.

01 DISPLAY CHARACTERISTICS

| | |
|---------------------|---|
| Design | ultra slim |
| Diagonal | 23.8", 60.5cm |
| Panel | IPS panel technology LED, matte finish |
| Native resolution | 1920 x 1080 @60Hz (2.1 megapixel Full HD) |
| Aspect ratio | 16:9 |
| Brightness | 250 cd/m² typical |
| Static contrast | 1000:1 typical |
| Advanced contrast | 80M:1 |
| Response time (GTG) | 4ms |
| Viewing zone | horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89° |
| Colour support | 16.7mIn 8bit (6bit + Hi-FRC) (sRGB: 96%; NTSC: 72%) |
| Horizontal Sync | 30 - 84KHz |
| Vertical Sync | 55 - 75Hz |
| Viewable area W x H | 527 x 296.5mm, 20.7 x 11.7" |
| Pixel pitch | 0.275mm |
| Colour | matte |

02 INTERFACES / CONNECTORS / CONTROLS

| | |
|---------------------|---|
| Signal input | VGA x1 (1920 x 1080 @60Hz) HDMI x1 (1920 x 1080 @75Hz) DisplayPort x1 (1920 x 1080 @75Hz) |
| USB HUB | x2 (v.2.0) |
| Headphone connector | yes |

03 FEATURES

| | |
|-----------------|--|
| OSD languages | EN, DE, FR, ES, IT, PT, RU, JP, NL, PL |
| Control buttons | Signal / Auto Adjust, + / Volume, - / Eco, Menu, Power |
| User controls | picture adjust (contrast, brightness, i-Style Colour, adv. aontrast, Eco, OD, X-Res technology), image settings (auto adjust, pixel clock, phase, H. position, V. position, sharp and soft, aspect), colour settings (gamma, 6-axis, colour temperature), OSD (OSD H. position, OSD V. position, OSD time, language), extra (reset, DDC/CI, signal select, audio source, HDMI range, opening logo, LED, information, volume) |
| Speakers | 2 x 2W |
| Convenience | Kensington-lock™ prepared, DDC/CI, DDC2B, Mac OSX |

04 MECHANICAL

| | |
|------------------------------|---------------------|
| Display position adjustments | tilt |
| Tilt angle | 21.5° up; 3.5° down |
| VESA mounting | 100 x 100mm |

05 ACCESSORIES INCLUDED

| | |
|--------|---------------------------------|
| Cables | power, USB, HDMI |
| Other | quick start guide, safety guide |

06 POWER MANAGEMENT


| | |
|-------------------|---|
| Power supply unit | internal |
| Power supply | AC 100 - 240V, 50/60Hz |
| Power usage | 19W typical, 0.5W stand by, 0.5W off mode |

07 SUSTAINABILITY

| | |
|-------------------------|---|
| Regulations | CE, TÜV-Bauart, EAC, VCCI-B, PSE, Energy Star |
| Energy efficiency class | A+ |
| Other | REACH SVHC above 0.1%: Lead |

08 DIMENSIONS / WEIGHT

| | |
|------------------------------|-----------------------|
| Product dimensions W x H x D | 539.5 x 415 x 199.5mm |
| Weight (without box) | 3.3kg |
| EAN code | 4948570117499 |

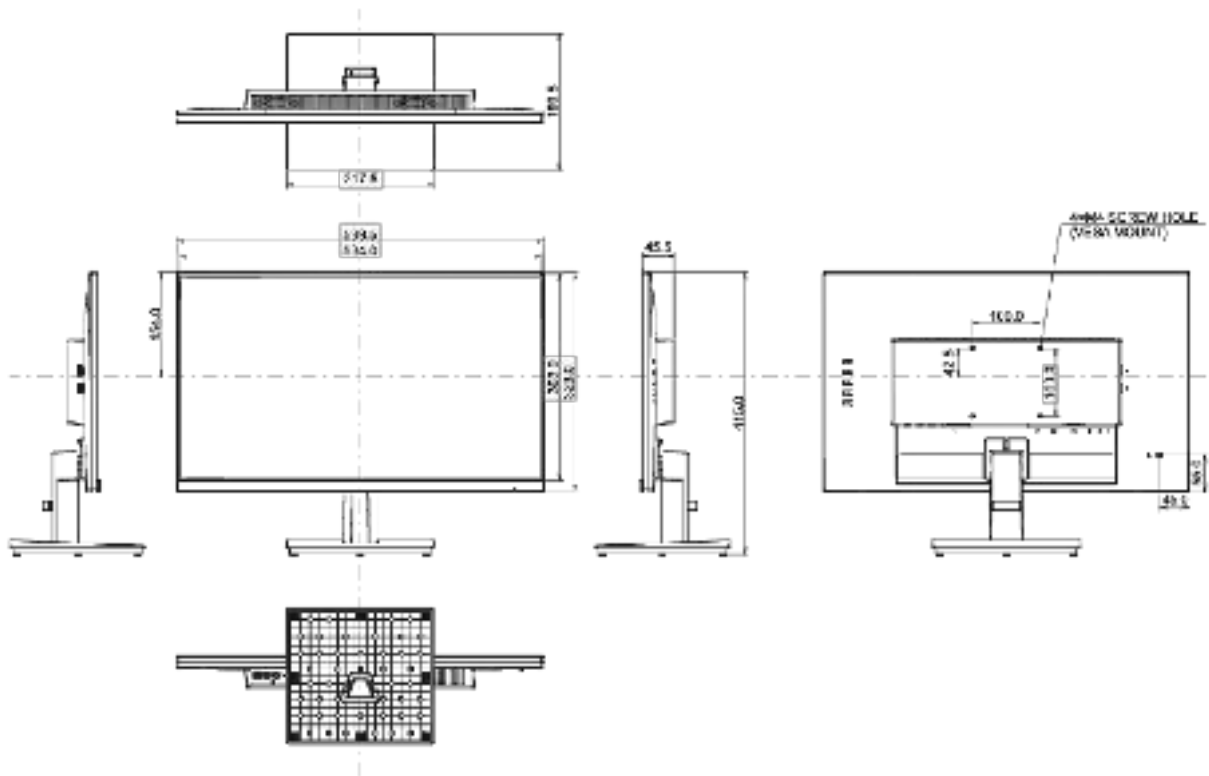

09 EU ENERGY EFFICIENCY LABEL

| | |
|---------------------------|----------------------------|
| Manufacturer | iiyama |
| Model | ProLite XU2493HSU-B1 |
| Energy efficiency class | A+ |
| Visible screen diagonal | 61cm; 23.8"; (24" segment) |
| ON mode power consumption | 19W |
| Power in Standby | 0.5W stand by |
| Power in OFF Mode | 0.5W off mode |
| Resolution | 1920 x 1080 |

