


Overview

HP V194 18.5-inch Monitor



1. **Menu:** Opens, selects or exits the OSD menu.
2. **Minus "-":** If the OSD menu is on, press to navigate backward through the OSD menu and decrease adjustment levels.
3. **Plus "+":** Select input source. If the OSD menu is on, press to navigate forward through the OSD menu and increase adjustment levels.
4. **OK:** If the OSD menu is on, press to select the highlighted menu item. If the OSD menu is inactive, press to activate the auto adjustment feature to optimize the screen image.
5. **Power:** Turns the monitor on or off.
6. **Power LED:** fully powered = green; sleep mode = amber; sleep timer mode = flashing amber.

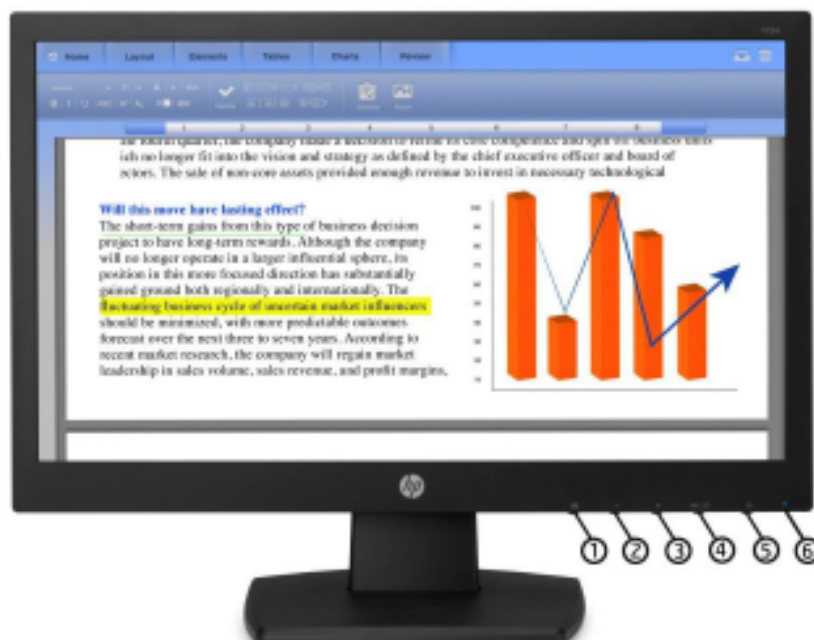

Use two HP V194 18.5-inch monitors with an HP Adjustable Dual Display Stand (AW664AA) for a small footprint, high productivity work solution.

(Multi-monitor support depends on your PC capability.
Monitors, stands, keyboard, mouse and notebook are sold separately.)

Overview

Part numbers

V5E94AA / V5E94A6 / V5E94A8

Introduction

Get quality presentation features at a price point that doesn't break the bank with the HP V194 18.5-inch Monitor, a sleek, thin-profile monitor in a compact, space-saving screen size with an unbelievably low price point.

Key Benefits

- Enjoy crisp, clear views of your documents and e-mail with 1366 x 768 resolution, 5M:1 dynamic contrast ratio, and 5 ms response time on an 18.5-inch diagonal screen.¹ Quickly and easily connect to your devices with a VGA input.
- Mount your HP Desktop Mini 260² directly behind the display for an integrated, affordable workspace that's perfect for small spaces. Or, use the integrated VESA mount to place the display on a wall or stand.²
- Reduce power consumption and help lower your costs with an intelligent, energy-efficient design that is ENERGY STAR® certified and EPEAT® Gold registered.³ The display also includes mercury-free display backlights and arsenic-free display glass.
- Customize your display's position with adjustable tilt settings and viewing angles.
- Rest assured that your IT investment is supported by a three-year standard limited warranty. To extend your protection, select optional HP Care Packs.⁴

1. All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.
 2. Compatible with HP Desktop Mini 260 G1 and G2, sold separately. HP Quick Release required and sold separately. Mounting hardware sold separately. Options sold separately.
 3. EPEAT® registered where applicable. EPEAT registration varies by country. See www.epeat.net for registration status in your country.
 4. Sold separately. Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. For details, visit www.hp.com/go/cpc. HP Services are governed by the applicable HP terms and conditions of service provided or indicated to Customer at the time of purchase. Customer may have additional statutory rights according to applicable local laws, and such rights are not in any way affected by the HP terms and conditions of service or the HP Limited Warranty provided with your HP Product.
-

Technical Specifications

Technical Specifications

Panel	Type	TN with LED backlight
	Viewable Image Area	46,99 cm (18.5 in) widescreen; diagonally measured
	Active Area (W x H)	40,98 x 23,04 cm (16.13 x 9.07 in)
	Aspect Ratio	16:9
	Viewing Angle (typical)	Up to 90° horizontal/65° vertical (10:1 minimum contrast ratio)
	Brightness (typical)*	200 cd/m ²
	Contrast Ratio (typical)*	600:1
	Dynamic Contrast Ratio (typical)*	5,000,000:1
	Response Rate (typical)*	5 ms (on/off)
	Pixel Pitch	0.3 mm
	Backlight Lamp Life* (to half brightness)	30K hours minimum
	Color Gamut*	72% (typical)
	Color Support**	Can display up to 16.7 million colors
<p>*All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.</p> <p>** With the use of FRC technology.</p>		
On Screen Display (OSD)	Buttons or Switches	Menu, Minus ("-"), Plus ("+"), OK, Power
	Languages	10 (English, Spanish, German, French, Italian, Netherlands, Portuguese, Japanese, T-Chinese and S-Chinese)
	User Controls	Brightness, Contrast, Color, Image Control, OSD control, Management, Language, Information, Factory Reset
Signal Interface/ Performance	Horizontal Frequency	30 to 80 kHz
	Vertical Frequency	50 to 60 Hz
	Native Resolution	1366 x 768 @ 60 Hz
	Preset VESA Graphic Modes (non-interlaced)	1366 x 768 @ 60 Hz
		1280 x 1024 @ 60 Hz*
		1280 x 800 @ 60 Hz*
		1280 x 720 @ 60 Hz
		1024 x 768 @ 60 Hz
		800 x 600 @ 60 Hz
		720 x 400 @ 70 Hz
		640 x 480 @ 60 Hz
	*Applicable to Serial Number 3CQ71501FP and later	
	Maximum Pixel Clock Speed	110 MHz
	User Programmable Modes	Yes, 20
	Anti-Glare	Yes

Technical Specifications

	Default Color Temperature	6500 K	
Video/Other Inputs	Plug and Play	Yes	
	Input Signal	VGA	
	Video Cable	(1) VGA	
	Video Cable Lengths	1,5 m (4.9 ft)	
Power	Power Supply	Internal	
	Input Power	100 - 240 VAC (50/60 Hz)	
	Typical Power Consumption	15 W	
	Maximum	17 W	
	Power Saving	0.5 W	
	Power Cable Length	1,5 m (4.9 ft)	
Mechanical	Dimensions (W x D x H)	Unpacked w/stand	44,14 x 21,81 x 33,86 cm (17.38 x 8.59 x 13.33 in)
		Unpacked w/o stand (head only)	44,14 x 4,54 x 27,77 cm (17.38 x 1.79 x 10.94 in)
		Packaged	55,4 x 10 x 34,6 cm (21.81 x 3.94 x 13.62 in)
	Weight	Head Only	2,4 kg (5.07 lb)
		Unpacked	2,6 kg (5.73 lb)
		Packaged	3,7 kg (8.2 lb)
	Tilt Range	-5° to + 22° vertical	
	Swivel Range	N/A	
	Height Adjustable	N/A	
	Pivot Rotation	N/A	
	Base	Detachable	
Environmental			
	Temperature – Operating	5° to 35° C (41° to 95° F)	
	Temperature – Non-operating	-20° to 60° C (-4° to 140° F)	
	Humidity – Operating	20% to 80% non-condensing	
	Humidity – Non-operating	5% to 95%, 38.7° C max wet-bulb	
	Altitude – Operating	0 to 5,000 m (0 to 16, 404 ft)	
	Altitude – Non-operating	0 to 12,192 m (0 to 40,000 ft)	
	White LED Backlights	Yes	
	CCFL Panel	No	
	Arsenic-Free Display Glass	Yes	
	Low Halogen⁴	No	

Technical Specifications

Environmental Data	Mercury-Free Display	Yes		
	Backlighting			
	Eco-Label Certifications & declarations	This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks: <ul style="list-style-type: none">IT ECO declarationUS ENERGY STAR®EPEAT® Gold registered in the United States. See http://www.epeat.net for registration status in your country.		
	Energy Consumption (in accordance with US ENERGY STAR® test method)	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
	Normal Operation	10.9 W	11.6 W	11.5 W
	Sleep	0.27 W	0.35 W	0.27 W
	Off	0.24 W	0.25 W	0.23 W
	Heat Dissipation*	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
	Normal Operation	37 BTU/hr	40 BTU/hr	39 BTU/hr
	Sleep	1 BTU/hr	1 BTU/hr	1 BTU/hr
Off	1 BTU/hr	1 BTU/hr	1 BTU/hr	
<i>*NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.</i>				
Additional Information	<ul style="list-style-type: none">This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).This product is in compliance with the IEEE 1680 (EPEAT) standard at the gold level, see www.epeat.netPlastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.This product contains 0% post-consumer recycled plastic (by wt.)This product is 98.4% recycle-able when properly disposed of at end of life.			
Packaging Materials	External:	PAPER/Paper	392 g	
	Internal:	PLASTIC/EPS (Expanded Polystyrene)	122 g	
		PLASTIC/EPE-Expanded Polyethylene	30 g	
		PLASTIC/Other plastics unknown	3 g	
RoHS Compliance	Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS)			

Technical Specifications

Material Usage

Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. By July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized that there is no technically feasible alternative (as indicated by an exemption under the EU RoHS Directive).

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at <http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf>):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Packaging

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

Technical Specifications

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c04755842>

and

<http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf>

Options

(sold separately)

HP LCD Monitor Quick Release – Part number EM870AA¹

An easy-to-use, VESA-compliant, LCD monitor mounting solution that allows you to quickly and securely attach an LCD monitor to a variety of stands, brackets, arms or wall mounts. For more information, refer to this product's QuickSpecs document.

HP Business PC Security Lock Kit – Part number PV606AA

Attaches to the rear of the PC with a six-foot steel cable that can be used to secure a PC or peripherals such as mice, keyboards, monitors or USB security devices to protect them against unauthorized removal by physically connecting the system to an anchor point.

HP Single Monitor Arm – Part number BT861AA

The flexible design of the HP Single Monitor Arm provides a seemingly endless range of display adjustments with an amazing 13 inches of lift, 50 degrees of tilt, and 360 degrees of pan and rotation – all at your fingertips -- helping you stay comfortable and productive throughout the day.

HP Adjustable Dual Display Stand – Part Number AW664AA

Premium space-saving dual screen solution provides access to more monitor real estate and makes it possible to manage multiple applications simultaneously. Weight adjustable for dual monitors from 17-24". Rotate displays into portrait/landscape positions.

What's in the box?

Monitor and accessories

HP V194 18.5-inch diagonal monitor
AC power cord **1,5 m** (4.9 ft)
VGA cable **1,5 m** (4.9 ft)

Documentation

Printed documentation

Other

User Guide Languages

English, Latin America, B. Portuguese, Japanese, T. Chinese, S. Chinese, Korean, Bahasa Indonesian, Arabic, Czech, Danish, Finnish, French, Greek, German, Hungarian, Italian, Kazakh, Dutch, Norwegian, Polish, Portuguese, Russian, Swedish, Slovenian, Spanish, Turkish, Hebrew.

Technical Specifications

Warranty Languages	English, Latin America, B. Portuguese, Japanese, T. Chinese, S. Chinese, Korean, Bahasa Indonesian, Arabic, Czech, Danish, Finnish, French, Greek, German, Hungarian, Italian, Kazakh, Dutch, Norwegian, Polish, Portuguese, Russian, Swedish, Slovenian, Spanish, Turkish, Hebrew.
Bezel Color	Black
VESA External Mounting	Yes, one set of standard 4-hole pattern, 100 mm.
Security Lock-Ready	Yes, one security lock slot available
Country of Origin	China
Certifications and Compliance	EPEAT® Silver (select regions) ³ , ENERGY STAR® qualified, CE, CB, KC, KCC, NOM, PSB, ICES, TUV-S, CCC, CECP, EPA, ISC, VCCI, FCC, ETL, TUV-GS, TUV, Taiwan: BSMI, China Energy Label (CEL) Grade 1, SmartWay - NA only
Compatibility	Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.
Service and Warranty	Protected by HP, including up to a 3 year standard limited warranty*. Optional Care Pack Services are extended service contracts which go beyond your standard warranties. ² *Warranty term may vary by region.

1. The HP Quick Release has been designed to support a maximum of up to 24 lbs (10.9 kg) for all devices mounted. Because mounting surfaces vary widely and the final mounting method and configuration may vary, mounting fasteners are not supplied (other than the VESA-compliant screws). HP recommends that you consult with a qualified engineering, architectural or construction professional to determine the appropriate type and quantity of mounting fasteners required for your application and to ensure that your mounting solution is properly installed to support applied loads.
2. Service levels and response times for HP Care Pack Services may vary depending on your geographic location. Service starts from date of hardware purchase. Restrictions and limitations apply. See www.hp.com/go/cpc for details..
3. EPEAT® Gold where HP registers commercial display products. See www.epeat.net for registration status in your country.
4. External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.

Copyright © 2017 HP Development Company, L.P.

ENERGY STAR is a registered mark owned by the U.S. government. The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Change Log

Summary of Changes

Date of change:	Version History:		Description of change:
28 March, 2017	V1 to V2		EPEAT certification changed from Silver to Gold
17 April 17, 2017	V2 to V3	Added	Timings to the Preset VESA Graphic Modes