

24" (23.6" viewable) Full HD Monitor with SuperClear® MVA Panel Technology

ViewSonic®
See the difference® 

Versatile Connectivity and Enhanced Viewing Comfort

VA2452Sm



Available for this model:
**Privacy Filter
Screen Protector**
VSPF2360
(SOLD Separately)

If you're looking for a dependable work monitor at a great value, look no further than the ViewSonic® VA2452Sm. Designed with SuperClear MVA panel technology and a matte-finish uniform bezel, this 24" (23.6" viewable) monitor delivers an incredible front-of-screen experience at almost any viewing angle. And we didn't stop there, future-proof DisplayPort, as well as DVI and VGA inputs, provide productivity-boosting connectivity to PC systems, laptops, and other work devices. Our exclusive ViewMode™ feature lets you select the optimal screen setting for different applications, while Flicker-free and Blue Light filter technology minimizes eye fatigue so you can work for extended periods of time. Add dual speakers, and you have the ultimate multimedia experience.

Key Features:

- Full HD 1080p resolution
- Stunning color performance & wide-angle viewing
- Flexible connectivity options
- Superior color rendering & intuitive settings
- Enhanced viewing comfort


Designed for:

Business

24" (23.6" viewable) Full HD Monitor with SuperClear® MVA Panel Technology



VA2452Sm

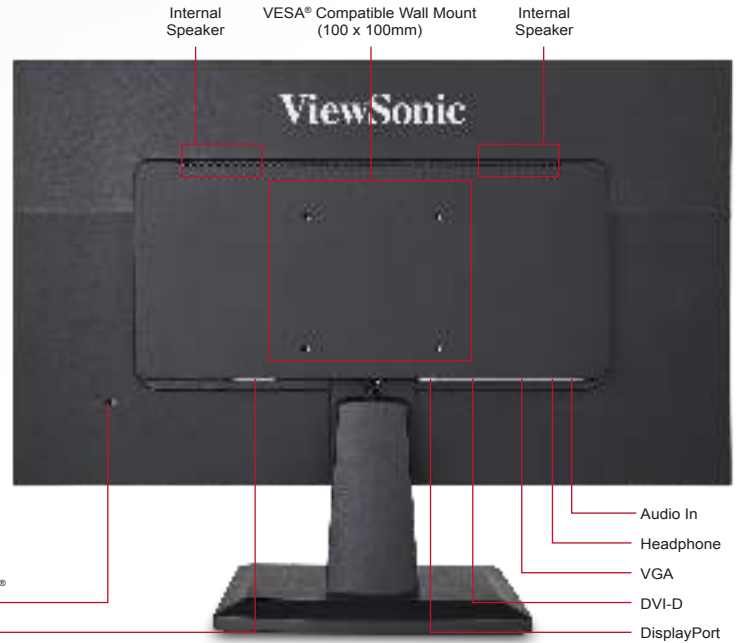

Specifications

LCD PANEL	Type	Color a-Si TFT Active Matrix LCD
	Display Area	20.5" horizontal x 11.5" vertical; 23.6" diagonal
	Optimum Resolution	1920x1080
	Brightness	250 cd/m ² (typ.)
	Contrast Ratio	3,000:1 (typ.)
	Viewing Angles	178° horizontal, 178° vertical
	Colors	16.7M (6bit + Hi-FRC)
	Response Time	6.5ms (GTG)
	Backlight	White-light LED
	Backlight Life	40,000 hours (min.)
	Panel Surface	Anti-glare, hard-coating (3H)
VIDEO INPUT	Digital	VGA, DVI-D, DisplayPort
	Frequency	Fh: 24~82kHz, Fv: 50~75Hz
AUDIO OUTPUT	Speakers	1.5-watt (x2)
	Sync	Separate Sync
COMPATIBILITY	PC	Up to 1920x1080 non-interlaced
	Mac®	Up to 1920x1080
CONNECTOR	Video In	VGA, DVI-D, DisplayPort
	Audio In	3.5mm mini jack
	Headphone	3.5mm mini jack
	Power	3-pin plug (CEE22)
CONTROLS	Front Panel Buttons	Power, 1, Up, Down, 2
	OSD	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)

ERGONOMICS	Tilt	Forward 5° / Back 20°
POWER	Voltage	AC 100~240V (universal), 50 / 60Hz
	Consumption	23W (typ.) / 30W (max.)
	Optimize	19W (typ.)
	Conserve	15W (typ.)
OPERATING CONDITIONS	Temperature	32~104° F (0~40° C)
	Humidity	10~90% (non-condensing)
DIMENSIONS (W x H x D)	Physical with Stand	22.2 x 16.6 x 7.7 in. / 517.7 x 399 x 196.8 mm
	Physical without Stand	22.2 x 13.2 x 1.9 in. / 517.7 x 334.9 x 49.5 mm
	Packaging	22.5 x 15.2 x 4.9 in. / 571 x 386 x 124 mm
WEIGHT	Net with Stand	8.6 lb. / 3.9 kg
	Net without Stand	7.8 lb. / 3.5 kg
	Gross	11.1 lb. / 5.0 kg
WALL MOUNT	VESA compatible	100 x 100mm
REGULATIONS		CE, CB, RoHS, Reach, WEEE, TCO 6.0, Erp, WHQL, Windows 8, Windows 7, cUL, ENERGY STAR, FCC-B, EPEAT Silver, Custom Union, UkrSEPRO, CCC, CEECP, CEL, BSMI, Green Mark, PSB, C-tick, GEMS
RECYCLE/DISPOSAL		Please dispose of in accordance with local, state, or federal laws
WARRANTY		Three-year limited warranty on parts, labor and backlight

Optional Accessories

Mini DisplayPort to DisplayPort Cable 6FT	CB-00010958
DVI-D to DVI-D Cable 6 Ft	CB-00008187
DisplayPort to DisplayPort Cable 30FT	CB-00010684
DisplayPort to DisplayPort Cable 6FT	CB-00010555
DisplayPort to DVI Adapter	LCD-CABLE-001
Desktop Display Wall Mount Kit	LCD-WMK-001

What's in the box?

VA2452Sm monitor, Power cable, VGA cable, Quick Start Guide



Programs, specifications and availability are subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2015 ViewSonic Corporation. All rights reserved. [17816-00B-03/15]

www.viewsonic.com