

### HS 272 PDB

68,6 cm / 27" Diagonal  
LED Backlight – Format 16:9

- 27" 16:9 LED Backlight Monitor
- 2560 x 1440 WQHD Resolution
- 178° / 178° Ultra Wide Viewing Angle
- Digital Inputs: Display Port + HDMI
- Daisy Chain, DP out
- Picture In Picture & Picture by Picture
- USB 3.0 HUB, 1 up - 3 down
- Built-In Stereo Speakers
- Tilt and Wall-Mountable (VESA)
- Low Power Consumption
- Multi-Video Modes
- Flicker Free
- Low Blue Light Mode



68,6 cm / 27"

Part No.: HS 272 PDB

#### SIZE, RESOLUTION



27"  
16:9 Aspect Ratio



WQHD  
2560 x 1440

#### CONNECTIVITY



DP  
HDMI



Daisy Chain  
DP Out

#### VIEWING ANGLE, VESA



178 Ultra-Wide  
Viewing Angle



VESA

#### OTHER FEATURES



PIP



Low Blue  
Light  
Mode





PBP



Flicker  
Free

Display Size	68,6cm / 27" Diagonal
Panel Type	TFT – LED Backlight, ADS Panel (*)
Aspect Ratio	16:9
Resolution (H x V)	2560 x 1440 WQHD
Brightness	300cd/m <sup>2</sup>
Contrast (Typ.)	1.000:1 (Typical)
Contrast (Active)	10.000.000:1 (Active)
Viewing Angle L/R; U/D	178° H – 178° V (CR >10)
Response Time	5 msec (with OD)
Pixel Pitch	0.2331 (H) x 0.2331 (V) mm
Panel Surface	Anti-Glare 25% Haze; 3H Hardness Coating
Display Colors	16.7M Colors
Horizontal Frequency	31 ~ 83 kHz
Vertical Frequency	56 ~ 75 Hz
Max Display Frequency	2560 x 1440 @ 60Hz
Input 1	HDMI 1.4
Input 2	DP 1.2
Output	DP 1.2 (for Daisy Chain)
Buil-in Speakers	Yes, 2W x 2; Audio Out Earphone Jack
Power Consumption	On: 21W; Stand-by: 0,5W; Off: 0,3W
AC Power Range	External PSU DC: 12V – 5A AC 100 ~ 240 Volt; 50 ~ 65 Hz
Product Dimensions	639,89 x 208 x 459,33 mm with stand (W x D x H) 639,89 x 46,9 x 380,81 mm without stand (W x D x H)
Packing Dimensions	712 x 120 x 453 mm (W x D x H)
Net / Gross Weight	5,2 Kg / 7,0 Kg

VESA Mounting	100 x 100 mm
Monitor Stand	Fixed Stand
Tilt / Kensington Lock	-5° ~ 20° / Yes
Pivot / Swivel	- / -
Controls	Menu(Input) / ▲(Bri) / ▼(Vol) / Auto(Return) / Power
Color	Warm, Nature, Cool, User Mode
Preset Mode	PC. Movie, Game Modes
On Screen Display	15 OSD Languages
Built-in USB Hub	USB 3.0: 1 upstream, 3 downstream
Other Features	Flicker Free / Low Blue Light Mode Picture In Picture / Picture by Picture
Accessory	Power Adaptor; Power Cable (1,5m); HDMI Cable (1,5m); Warranty Card; Quick Start Guide

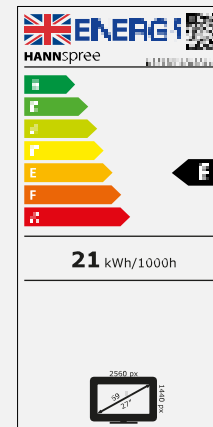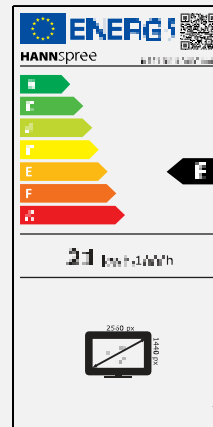

Supplier's Name	HANNspree
Model Name	HS272PDB
Energy efficiency class for standard Dynamic Range (SDR)	E
Annual Energy Power Consumption (kWh/1000h)	21 kWh/1000h
On mode power demand for Standard Dynamic Range (SDR)	21 W
Off mode power demand (W)	0,3 W
Standby mode power demand (W)	0,5 W
Screen Diagonal (cm / inches)	68,6 cm / 27"
Resolution	2560 x 1440

PART NO.:  
HS 272 PDB



\* "ADS" word mark / trademark and related patents on technologies belong to their respective owners.

Display Solutions