

Philips Monitor
4K OLED monitor

8000 series

27 (26.9" / 68.4 cm diag.)
3840 x 2160 (4K UHD)

27E1N8900



Uncompromised visuals, exceptional details

This Philips OLED monitor is designed for professionals. UltraClear 4K UHD and DisplayHDR 400 TrueBlack certified deliver stunning and precise color reproduction. 99% AdobeRGB takes your creation experience to the next level.

Single cable USB-C connection

- Connect your notebook with one USB-C cable

Superb Picture Quality

- OLED display for lifelike visuals with deeper black details
- UltraClear 4K UHD (3840x2160) resolution for precision
- DisplayHDR™ TrueBlack 400 delivers incredible shadow details
- Ultra Wide-Color wider range of colors for a vivid picture
- Pro color standards 99% AdobeRGB, 99% DCI-P3

Features designed for you

- Eyesafe certified blue light protection and color accuracy
- LowBlue mode and Flicker-free easy-on-the eyes viewing
- MultiView enables simultaneous dual connection and view
- Color space mode options to fit your needs and work
- Built-in KVM switch to easily switch between sources
- SmartErgoBase enables people-friendly ergonomic adjustments



PHILIPS

4K OLED monitor
8000 series 27 (26.9" / 68.4 cm diag.), 3840 x 2160 (4K UHD)

27E1N8900/96


Highlights

Philips OLED display



This Philips OLED display delivers a wider viewing angle and a uniquely lifelike visuals. Deeper black for stunning viewing experience. Details in shadows and highlights are precisely reproduced.

UltraClear 4K UHD Resolution

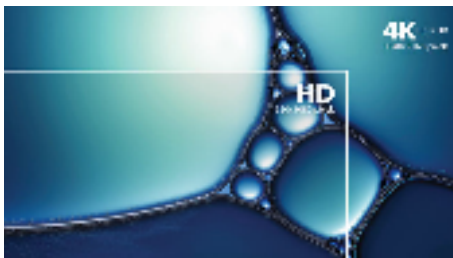

These Philips displays utilize high performance panels to deliver UltraClear, 4K UHD (3840 x 2160) resolution images. Whether you are demanding professional requiring extremely detailed images for CAD solutions, using 3D graphics applications or a financial wizard working on huge spreadsheets, Philips displays will make your images and graphics come alive.

DisplayHDR™ True Black 400

This Philips monitor is certified with VESA DisplayHDR™ True Black 400. Delivering stunningly accurate shadow detail with deeper blacks for a remarkable visual experience compared with conventional monitors of the same peak luminance. This Philips monitor comes with several HDR modes, each optimized for your usage scenarios: HDR Game, HDR Movie, HDR Photo, and VESA DisplayHDR certified level.

99% AdobeRGB and DCI-P3

Different types of creators require different color spaces and need to know the colors they see on screen are correctly represented. With these color gamut spaces professionals have

access to the wide range of colors they need to produce their best work. Meeting professional industry-standard color, this Philips monitor offers 99% AdobeRGB, 99% DCI-P3 color spectrum. The enhanced color rendering range of Adobe RGB makes it ideal for professional photo and video editing, animation, or work with color-critical projects. You can now be confident that your color is consistent and true to the origi

USB-C connection



This Philips display features a USB type-C connector with power delivery. With intelligent and flexible power management, you can power charge your compatible device directly. Its slim, reversible USB-C allows for easy, one-cable connection. You can watch high resolution video and transfer data at a super-speed, while powering up and re-charging your compatible device at the same time.

TUV Rheinland Eyesafe

Philips display meets TUV Rheinland Eyesafe® standard to truly protect you from the long exposure to blue light. The always-on blue light filter not only helps reduce digital eye strain, but also guarantees color integrity.


LowBlue Mode & Flicker-free



Our LowBlue Mode and Flicker-free technology have been developed to reduce eye

strain and fatigue often caused by long hours in front of a monitor.

MultiView technology

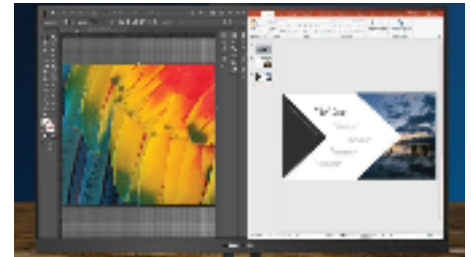

With the ultra-high resolution Philips MultiView display you can now experience a world of connectivity. MultiView enables active dual connect and view so that you can work with multiple devices like a PC and notebook simultaneously, for complex multi-tasking.

Multiple color space modes

This Phillips monitor provides color in the RGB color model with the following color space modes. Choose the appropriate color space mode to properly display the content you are viewing: sRGB: Most personal computer applications and games, internet, and web design. Adobe RGB: Graphics applications. NTSC: Analog video. Rec. 709: HD videos. Rec. 2020: UHD videos. DCI-P3: Digital cinema projectors, some movies and games, and Apple products. Photography. D-mode: DICOM mode, enhance greyscale level performance.

MultiClient Integrated KVM



With MultiClient Integrated KVM switch, you can control two separate PCs with one monitor-keyboard-mouse set up. A convenient button allows you to quickly switch between sources. Handy with set-ups that require dual PC computing power or sharing one large monitor to show two different PCs.



Specifications

Picture/Display

- Monitor Panel Type: OLED
- Panel Size: 26.9 inch / 68.4 cm
- Effective viewing area: 596.16 (H) x 335.34 (V)
- Surface treatment: Haze: 7%, Hardness \geq 2H
- Aspect ratio: 16:9
- Optimum resolution: 3840 x 2160 @ 60 Hz
- Pixel Density: 163.78 PPI
- Response time (typical): 0.1 ms (Tr + Tf)
- Brightness: Full White Luminance: 250 cd/m²; Peak White Luminance: 540 cd/m²
- Contrast ratio (typical): 1,000,000:1
- SmartContrast: Mega Infinity DCR
- Pixel pitch: 0.15525 x 0.15525 mm
- Viewing angle: 178° (H) / 178° (V), @ C/R > 10
- Picture enhancement: SmartImage
- Display colors: 1.07B (10 bits)
- Color gamut (min.): DCI-P3 99.7%*
- Color gamut (typical): NTSC 119%*, sRGB 150%*, Adobe RGB 99.6%*
- HDR: DisplayHDR True Black 400 certified
- Scanning Frequency: 30 - 140 kHz (H) / 23 - 60 Hz (V)
- Flicker-free
- SmartUniformity: 93 ~ 105%
- Delta E: < 1
- LowBlue Mode
- EasyRead
- sRGB

Connectivity

- Signal Input: HDMI 2.0 x 2, DisplayPort 1.4 x 1, USB-C 3.2 Gen 1 x 1 (upstream, Power Delivery up to 90W)
- USB: USB-B x 1, USB 3.2 x 4 (downstream with 2 fast charge B.C 1.2)
- HDCP: HDCP 1.4 (HDMI / DisplayPort / USB-C), HDCP 2.2 (HDMI / DisplayPort / USB-C)
- HBR3
- Sync Input: Separate Sync
- Audio (In/Out): Audio out

USB

- USB-C: Reversible plug connector
- Super speed: Data and Video transfer
- DP: Built-in Display Port Alt mode
- Power delivery: USB PD version 3.0
- USB-C max. power delivery: Up to 90W (5V/3A, 7V/3A, 9V/3A, 10V/3A, 12V/3A, 15V/3A, 20V/4.5A)

Convenience

- MultiView: PBP (2x devices)
- KVM
- User convenience: Power On/Off, Menu, Input, SmartImage, Color Space
- OSD Languages: Brazil Portuguese, Czech, Dutch, English, Finnish, French, German, Greek,

- Hungarian, Italian, Japanese, Korean, Polish, Portuguese, Russian, Simplified Chinese, Spanish, Swedish, Traditional Chinese, Turkish, Ukrainian
- Other convenience: Kensington lock, VESA mount (100x100mm)
- Plug & Play Compatibility: DDC/CI, Mac OS X, sRGB, Windows 11 / 10 / 8.1 / 8 / 7

Stand

- Height adjustment: 130 mm
- Pivot: + 90 degree
- Swivel: -/+ 175 degree
- Tilt: -5/20 degree

Power

- On mode: 26.49 W (typ.) (EnergyStar test method)
- Standby mode: 0.5 W (typ.)
- Off mode: 0.3 W (typ.)
- Power LED indicator: Operation - White, Standby mode- White (blinking)
- Power supply: External, 100-240VAC, 50-60Hz

Dimensions

- Product with stand(max height): 626 x 536 x 218 mm
- Product without stand (mm): 626 x 373 x 40 mm
- Packaging in mm (WxHxD): 780 x 480 x 161 mm

Weight

- Product with stand (kg): 5.51 kg
- Product without stand (kg): 3.83 kg
- Product with packaging (kg): 9.89 kg

Operating conditions

- Temperature range (operation): 0 to 40 °C
- Temperature range (storage): -20 to 60 °C
- Relative humidity: 20%-80 %
- Altitude: Operation: +12,000ft (3,658m), Non-operation: +40,000ft (12,192m)
- MTBF: 70,000 hour(s)

Sustainability

- Environmental and energy: EnergyStar 8.0, EPEAT*, TCO Certified Edge, RoHS
- Recyclable packaging material: 100 %
- Specific Substances: Mercury free, PVC / BFR free housing

Compliance and standards

- Regulatory Approvals: CB, CE Mark, FCC Class B, ICES-003, cETLus, TUV Eyesafe certified, TUV Flicker Free certified, CU-EAC, EAEU RoHS, TUV/ISO9241-307, TUV-BAUART, BSMI

Cabinet

- Color: Black
- Finish: Textured



Issue date 2022-11-10

Version: 2.0.1

12 NC: 8670 001 87811
EAN: 87 12581 80037 6

© 2022 Koninklijke Philips N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips N.V.
or their respective owners.

www.philips.com

* DCI-P3 Coverage based on CIE1976

* NTSC Area based on CIE1976

* sRGB Area based on CIE1931

* Adobe RGB Coverage based on CIE1976

* For USB-C power and charging function, your Notebook/device must support USB-C standard Power Delivery specifications. Please check with your Notebook user manual or manufacturer for more details.

* For Video transmission via USB-C, your Notebook/device must support USB-C DP Alt mode

* EPEAT rating is valid only where Philips registers the product. Please visit <https://www.epeat.net/> for registration status in your country.

* The monitor may look different from feature images.