

Philips Curved Business  
Monitor  
32:9 SuperWide curved  
monitor with USB-C

### 6000 series

45 (44.5" / 113 cm diag.)  
5120 x 1440 (Dual QHD)

45B1U6900CH



## Beyond well-equipped

with pop-up webcam

This USB-C monitor is for video watching, data transfer and power delivery. The integrated 5MP webcam delivers sharp images, and noise cancelling mic let people hear you fine. Windows Hello Webcam for quick access and strong security.

#### Single cable USB-C connection

- RJ-45 to USB-C gives easy network connection with security
- USB 3.2 high speed data transfer

#### Superb Picture Quality

- VA display delivers awesome images with wide viewing angles
- DisplayHDR 400 for more lifelike and outstanding visuals

#### Designed for the way you work

- Curved display design for more immersive experience
- 32:9 SuperWide screen designed to replace multiscreen setups
- Built-in KVM switch to easily switch between sources
- Webcam with noise cancelling microphone for collaboration
- Tilt, swivel and height-adjust for an ideal viewing position
- Eyesafe certified blue light protection and color accuracy

#### Designed for sustainability

- PowerSensor saves up to 80% energy costs



# PHILIPS

32:9 SuperWide curved monitor with USB-C  
6000 series 45 (44.5" / 113 cm diag.), 5120 x 1440 (Dual QHD)

45B1U6900CH/69

# Highlights

## USB-C Docking with RJ45



Simplify all peripherals from monitor to PC using one-cable-docking USB Type-C connector, includes networking, high resolution video output from PC to monitor, and surfing on Internet without an additional network cable, even without LAN port on your notebook. RJ45 connection through USB-C offers a fast and secure connection when needed. Getting the fastest data speeds allows you to transfer data from a HDD to your PC faster than ever. Additionally, USB-C with power delivery can even enable you to power and charge your notebook from the monitor, eliminating the need for extra power cables.

## DisplayHDR 400



VESA-certified DisplayHDR 400 delivers a significant step-up from normal SDR displays. Unlike, other 'HDR compatible' screens, true DisplayHDR 400 produces astonishing brightness, contrast and colors. With global dimming and peak brightness up-to 400 nits, images come to life with notable highlights while featuring deeper, more nuanced blacks. It renders a fuller palette of rich new colors, delivering a visual experience that engages your senses.

## Curved display design



Desktop monitors offer a personal user experience, which suits a curve design very well. The curved screen provides a pleasant yet subtle immersion effect, which focuses on you at the center of your desk.

## 32:9 SuperWide



32:9 SuperWide 49" screen, with 5120 x 1440 resolution, is designed to replace multiscreen setups for massive wide view. It's like having two 27" 16:9 Quad HD displays side-by-side. SuperWide monitors offer screen area of dual monitors without the complicated setup.

## MultiClient Integrated KVM



With MultiClient Integrated KVM switch, you can control two separate PCs with one monitor-keyboard-mouse set up. A convenient button allows you to quickly switch between sources. Handy with set-ups that require dual


PC computing power or sharing one large monitor to show two different PCs.

## Webcam & noise cancelling mic



This Philips monitor comes with built-in 5MP webcam, noise cancelling microphone, and speakers. Making it perfect for working from home and collaborating remotely. The webcam is certified for Windows Hello. Equipped with advanced sensors for Windows Hello™ facial recognition, which conveniently logs you into your Windows devices in less than 2 seconds. The physical camera switch offers extra privacy when not in use. The noise-cancelling microphone and dual 5-watt integrated speakers deliver clear communications.

## PowerSensor

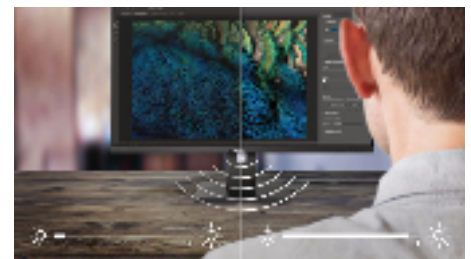

PowerSensor is a built-in 'people sensor' that transmits and receives harmless infrared signals to determine if user is present and automatically reduces monitor brightness when user steps away from the desk, cutting energy costs by up to 80 percent and prolonging monitor life



# Specifications

## Picture/Display

- LCD panel type: VA LCD
- Backlight type: W-LED system
- Panel Size: 44.5 inch / 113 cm
- Display Screen Coating: Anti-Glare, 2H, Haze 25%
- Effective viewing area: 1087.488 (H) x 305.856 (V)  
- at a 1500R curvature\*
- Aspect ratio: 32:9
- Maximum resolution: 5120 x 1440 @ 75 Hz
- Pixel Density: 120 PPI
- Response time (typical): 4 ms (Gray to Gray)\*
- Brightness: 450 cd/m<sup>2</sup>
- Contrast ratio (typical): 3000:1
- SmartContrast: 80,000,000:1
- Pixel pitch: 0.2124 x 0.2124 mm
- Viewing angle: 178° (H) / 178° (V), @ C/R > 10
- Flicker-free
- Picture enhancement: SmartImage
- Display colors: 16.7 M (8 bit)
- Color gamut (typical): NTSC 107%\*, sRGB 123%\*
- HDR: DisplayHDR 400 certified
- Scanning Frequency: 30 - 114 kHz (H) / 48 - 75 Hz (V)
- SmartUniformity: 93 ~ 105%
- Delta E: < 2
- sRGB
- LowBlue Mode
- EasyRead
- Adaptive sync

## Connectivity

- Signal Input: HDMI 2.0 x 2, DisplayPort 1.4 x 1, USB-C x 2 (upstream, DP Alt mode, Data, PD up to 100W)
- HDCP: HDCP 1.4 (HDMI / DisplayPort / USB-C), HDCP 2.2 (HDMI / DisplayPort / USB-C)
- HBR3: HBR3 (USB-C / DisplayPort)
- USB Hub: USB 3.2 Gen 2 / 10 Gbps, USB-A downstream x 4 (with 1 for fast charge B.C 1.2), USB-C downstream x 1 (Data, PD 15W)
- Audio (In/Out): Audio out / Microphone in combo jack
- RJ45: Ethernet LAN up to 1G\*, Wake on LAN
- Sync Input: Separate Sync

## Power Delivery

- Version: USB PD version 3.0
- Max power delivery: Up to 100 W\* (5V/3A, 7V/3A, 9V/3A, 10V/3A, 12V/3A, 15V/3A, 20V/4.8A)

## Convenience

- Built-in Speakers: 5 W x 2
- Built-in webcam: Pop-up 5.0 megapixel camera with microphone and LED indicator (for Windows Hello)
- Noise cancellation
- MultiView: PIP/PBP mode, 2x devices
- KVM: Yes (USB-C/USB-C)
- User convenience: Mic, SmartImage, Input, User, Menu, Power On/Off
- Control software: SmartControl
- OSD Languages: Brazil Portuguese, Czech, Dutch, English, French, Finnish, German, Greek,

- Hungarian, Italian, Japanese, Korean, Portuguese, Polish, Russian, Simplified Chinese, Spanish, Swedish, Traditional Chinese, Turkish, Ukrainian
- Other convenience: Kensington lock, Earphone hook, VESA mount (100x100mm)
- Plug & Play Compatibility: DDC/CI, Mac OS X, sRGB, Windows 11 / 10 / 8.1 / 8

## Stand

- Height adjustment: 150 mm
- Swivel: -/+45 degree
- Tilt: -5/15 degree

## Power

- ECO mode: 39.4 W (typ.)
- On mode: 46.3 W (typ.) (EnergyStar test method)
- Standby mode: 0.3 W (typ.)
- Off mode: Zero watts with AC switch
- Power LED indicator: Operation - White, Standby mode- White (blinking)
- Power supply: Built-in, 100-240VAC, 50-60Hz

## Dimensions

- Product with stand(max height): 1085 x 515 x 238 mm
- Product without stand (mm): 1085 x 337 x 158 mm
- Packaging in mm (WxHxD): 1180 x 235 x 535 mm

## Weight

- Product with stand (kg): 12.96 kg
- Product without stand (kg): 9.90 kg
- Product with packaging (kg): 17.26 kg

## Operating conditions

- Temperature range (operation): 0°C to 40 °C
- Temperature range (storage): -20°C to 60 °C
- Relative humidity: 20%-80 %
- Altitude: Operation: +12,000ft (3,658m), Non-operation: +40,000ft (12,192m)
- MTBF (demonstrated): 70,000 hrs (excluded backlight)

## Sustainability

- Environmental and energy: PowerSensor, LightSensor, EnergyStar 8.0, EPEAT\*, RoHS, TCO Certified Edge
- Recyclable packaging material: 100 %
- Post consumer recycled plastic: 85%
- Specific Substances: Mercury free, PVC / BFR free housing

## Compliance and standards

- Regulatory Approvals: CB, CE Mark, FCC Class B, ICES-003, CU-EAC, EAEU RoHS, TUV Ergo, TUV/ GS, TUV Eyesafe certified, cETLus, PSB

## Cabinet

- Front bezel: Black
- Rear cover: Black
- Foot: Black
- Finish: Texture



Issue date 2023-03-16

Version: 1.0.1

12 NC: 8670 001 88756  
EAN: 87 12581 80096 3

© 2023 Koninklijke Philips N.V.  
All Rights reserved.

Specifications are subject to change without notice.  
Trademarks are the property of Koninklijke Philips N.V. or their respective owners.

[www.philips.com](http://www.philips.com)

\* Radius of the arc of the display curvature in mm

\* Response time value equal to SmartResponse

\* NTSC Area based on CIE1976

\* sRGB Area based on CIE1931

\* For Video transmission via USB-C, your Notebook/device must support USB-C DP Alt mode

\* Activities such as screen sharing, on-line streaming video and audio over the Internet can impact your network performance. Your hardware, network bandwidth and its performance will determine overall audio and video quality.

\* For USB-C power and charging function, your Notebook/device must support USB-C standard Power Delivery specifications. Please check with your Notebook user manual or manufacturer for more details.

\* If your Ethernet connection seems slow, please enter OSD menu and select USB 3.0 or higher version which can support the LAN speed to 1G.

\* The USB-C power delivery of this display is up to 100 W (96 W in typical), the maximum power delivery will depend on your device.

\* When calculating energy costs saving from PowerSensor, both USB and Power delivery are excluded.

\* EPEAT rating is valid only where Philips registers the product. Please visit <https://www.epeat.net/> for registration status in your country.

\* The monitor may look different from feature images.