

SHARP

Be Original.

PN-70TW3A
PN-60TW3A
TOUCHSCREEN LCD MONITOR

Easy Wireless Functionality for Seamless and Lively Meetings



BIG PAD

The BIG PAD That Lets You BYOD and Unleash the Creativity

The PN-70TW3A/60TW3A touchscreen LCD monitors boast wireless connectivity that enables a range of different devices to connect to them. Information from those devices can be displayed in a 2 x 2 split screen, allowing for highly productive interactions. Using SHARP Touch Viewing Software, you can manipulate various file types in the same work area. The pen digitizer function, meanwhile, distinguishes between pen and finger input and supports natural and seamless operation. These and other superb BIG PAD features are sure to boost creativity and participation levels in presentations and small-scale meetings, while fulfilling the growing demand for cable-free connection of BYOD.



Flexible Communications with a Variety of Devices

Wireless Connectivity

Now there's no need to mess about with tangled wires or conversion adaptors when you want to share your ideas. The PN-70TW3A/60TW3A has a built-in wireless controller that enables multiple devices—including Mac® or Windows® computers, smartphones, and tablets—to connect wirelessly via dedicated connection software. Mac and Windows users also have a handy option for quick, temporary connection: they can launch the wireless connection software on the bundled token without pre-installing anything. Thanks to wireless connectivity on the PN-70TW3A/60TW3A, meeting participants can bring their own devices (BYOD) and enjoy speedy and active communications.

Note: Connection software is downloadable from the App Store (iOS®) or Google Play (Android™).

Wireless Connection System Requirements

Windows® Mac®	CPU	Intel® Celeron® B810E 1.6 GHz or higher Intel® Core™ i7-3517UE 1.7 GHz or higher recommended
	OS	Windows® 7 (32 bit/64 bit), Windows® 8.1 (32 bit/64 bit), Windows® 10 (32 bit/64 bit)* Mac® OS X® v10.9, macOS® X v10.10
	Memory	2 GB or more (4 GB or more recommended)
	Hard disk	200 MB capacity or more
iOS®	iPhone®, iPad® operating on Apple® iOS® 7.0 or later	
Android™	Smartphone or tablet operating on Android™ 4.0 or later	

* Use in desktop mode

2 x 2 Split-Screen Display

The PN-70TW3A/60TW3A can connect wirelessly with multiple mobile devices and simultaneously display the onscreen contents of those devices in a 2 x 2 split screen. Alternatively, any one of the individual screens can be enlarged to full-screen size. The screen can be switched either from the BIG PAD or from a connected device.



Enhanced Security

Because data is not stored during wireless connection, there's no need to worry about any leakage of confidential information from a discussion or presentation.

Overlay Function


In overlay mode, you can write annotations on a transparent screen that overlays the visible onscreen content. Text and graphics written on the BIG PAD can be captured—along with the contents on the screen—and saved as JPEG files on a connected USB memory device or on a wirelessly connected Mac or Windows PC. The overlay function is a major boon when you want to share meeting notes with participants and others.

Note: Original files or content shown on the screen cannot be accessed directly during overlay mode.



Direct Drawing Function

The PN-70TW3A/60TW3A can be quickly switched to enable use of Direct Drawing, a user-friendly function that's just like using a whiteboard. Even for first-time users, this simple write-and-erase function is easy and intuitive to operate. Screen captures can be saved as JPEG files on a USB memory device.

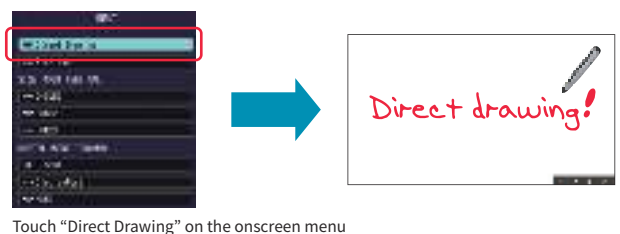

Flexible, Natural Work Environment

Revolutionise Discussions with SHARP Touch Viewing Software

SHARP Touch Viewing Software is a touch-operated onscreen user interface that lets you easily view, manipulate, and write annotations on different types of files, including Microsoft® Office applications, videos, and web pages. Being able to organise a variety of file types in one work area allows you to have more active discussions.

View various types of file in one work area

Various kinds of file*—including Microsoft Office files, PDFs, web pages, and image and video files—can be displayed on the screen as “sheets”. There’s no need to open the respective applications, and you can view all the different files simultaneously in the same work area.

* Viewable files: Microsoft Office (Excel®, Word, PowerPoint®), PDF, JPEG/PNG/BMP/TIFF, and WMV/AVI/MP4/FLV.

Edit original data

Original Microsoft Office files displayed as “sheets” can be opened easily with compatible applications and edited.

Store onscreen layouts

Onscreen layouts of “sheets” can be stored for later retrieval, so you can easily restart a discussion where you left off.

Note: Download SHARP Touch Viewing Software from the bundled CD-ROM.



* Drawers can be linked to PC folders or network folders.

Pen Digitizer Functionality Boosts Communicative Potential

The PN-70TW3A/60TW3A features a pen digitizer function* that automatically distinguishes pen and finger input, allowing you to perform pen and touch operations without having to switch modes. The bundled touch pen employs a pressure sensor that faithfully renders your writing style. The pen digitizer function is compatible with Microsoft Office (Excel, Word, PowerPoint, OneNote®), Adobe Photoshop®, Adobe Illustrator®, and SHARP Touch Viewing Software.

* Not certified by Microsoft.

Smooth Operation and Comfortable Writing

Simultaneous Writing for Up to 4 People

The PN-70TW3A/60TW3A lets you capture ideas at the moment of creation. Recognising up to 10 touch points, they allow up to four people to write at the same time with a finger or touch pen.

User-Friendly SHARP Pen Software Interface

The easy-to-launch SHARP Pen Software user interface incorporates a menu comprising smartly arranged icons that provide easy access to pen settings and functions. Settings such as colour and line thickness can be established for each touch pen. The menus for each pen can be displayed in a floating format that allows them to be moved to any convenient location on the screen.



Touch-operated onscreen menu

Pressing the Touch Menu button on the PN-70TW3A/60TW3A instantly displays an onscreen menu that lets you easily switch input sources, change volume level, or turn the touchscreen function on and off without using a remote controller.

Handwriting Recognition

A handwriting recognition* function converts selected onscreen handwriting into standard text. This convenient function allows you to utilise onscreen content to make neat and legible minutes of your meetings.

* Works with languages supported by SHARP Pen Software.

Minimise glare and fingerprints

Protecting the screen is an anti-glare film that works to reduce glare and reflections and minimise fingerprint soiling on the glass.

Front-mounted speakers

Two speakers (10 W + 10 W) are mounted low on the front of the LCD monitor to deliver clearer sound.

SHARP Display Connect

This software*¹ is especially effective for communications with large audiences. By allowing the BIG PAD to share its onscreen content with up to 50 devices*², and by enabling the exchange of files between those devices, SHARP Display Connect facilitates lively discussions and paperless meetings in both business and educational settings.

*¹ Access the downloader on the bundled CD-ROM to install the software.


*² OS requirements (as of March 2017): Host: Windows 7, Windows 8.1, Windows 10; Client: Windows 7, Windows 8.1, Windows 10, Mac® OS X® v10.7, v10.8, v10.9, v10.10, v10.11, macOS® v10.12, Android 2.3–7.1, iOS 6–10. Please comply with the license agreements of your OS and installed applications. Connecting 26 or more mobile devices requires at least two LAN access points.

Specifications

Model Name		PN-70TW3A	PN-60TW3A
Installation		Landscape	
LCD Panel		70-inch-class (69 1/2-inch [176.6 cm] diagonal) UV ² A ^{*1} LCD	
	Max. Resolution	1,920 x 1,080 pixels	
	Max. Display Colours (approx.)	1.06 billion colours	
	Pixel Pitch (H x V)	0.802 x 0.802 mm	0.692 x 0.692 mm
	Max. Brightness (average) ^{*2}	300 cd/m ²	
	Contrast Ratio	3,000 : 1	
	Viewing Angle (H/V)	160°/160° (CR ≥10)	
	Active Screen Area (W x H) (approx.)	1,538.9 x 865.6 mm (60 3/16" x 34 1/16")	1,329.1 x 747.6 mm (52 5/16" x 29 7/16")
	Response Time	6 ms (grey to grey, avg.)	
	Backlight	LED, edge lit	
Touchscreen	Touch Technology	IR (infrared blocking detection method)	
	PC Connection Port	USB (2.0 compliant) (Type B) x 2	
	Power Supply	Supplied from main unit	
	Multi Touch	10 points	
	Protection Glass	Thickness: Approx. 3.4 mm ^{*3} Shock resistance: 130 cm ^{*4}	Thickness: Approx. 3.0 mm ^{*3} Shock resistance: 130 cm ^{*4}
Touch Pen	Communication	Wireless communication method	
	Function Button	Yes	
Wireless Controller		Wireless communication method (2.4 GHz, IEEE802.11 b/g/n) (5 GHz, IEEE802.11 a/n)	
Computer Input	LAN Terminal	10Base-T/100Base-TX	
	USB Port	USB (2.0 compliant) (Type A) x 1	
	Wireless Adaptor Port	USB (2.0 compliant) (Type A) x 1	
	Video	Analogue RGB (0.7 Vp-p) [75Ω], DisplayPort™ 1.1a	
	Synchronisation	Horizontal/vertical separation (TTL: positive/negative), Sync on green ^{*5} , Composite sync (TTL: positive/negative) ^{*5}	
	Plug & Play	VESA DDC2B	
	Power Management	VESA DPMS	
Video Colour System		NTSC (3.58 MHz, 4.43 MHz), PAL, PAL60, SECAM	
Input Terminals ^{*6}		PC analogue: Mini D-sub 15-pin x 2 ^{*7} , HDMI™ (HDCP and 1080p compatible, PC/AV signal compatible) x 3, 3.5 mm-diameter mini stereo jack x 2, Video x 1 ^{*7} , Component video x 1 ^{*7} , DisplayPort (HDCP compatible, PC signal compatible) x 1, RS-232C x 1 ^{*8}	
Output Terminals ^{*6}		3.5 mm-diameter mini stereo jack x 1, DisplayPort (HDCP compatible) x 1	
Input/Output Terminals ^{*6}		LAN port (10Base-T/100Base-TX) x 1	
Speaker Output	Built-in	10 W + 10 W	
	External	10 W + 10 W (6Ω)	
Mounting		VESA (4 points), 400 x 200 mm pitch, M6 screw	
Power Supply		100V – 240V AC, 50/60 Hz	
Power Consumption		235 W	190 W
Environmental Conditions	Operating Temperature	5° C to 35° C	
	Operating Humidity	20% to 80% RH (no condensation)	
Dimensions (W x D x H) (approx.) (display only)		1,647 x 94 x 1,010 mm (64 13/16" x 3 11/16" x 39 3/4")	1,437 x 94 x 890 mm (56 9/16" x 3 11/16" x 35 1/16")
Weight (approx.)		61 kg (134.5 lbs)	48 kg (105.9 lbs)
Main Accessories		AC power cord, remote control unit, battery (AA size x 2), set-up manual, blank sticker, cable clamps x 5, camera mount, USB cable (3.0 m), eraser, pen tray, touch pen (with function button), pen adaptor, touch pen battery (AAA size), SHARP Display Connect software CD-ROM, wireless token, wireless adaptor, wireless adaptor cover, RS-232C conversion cable (3.5 mm-diameter mini stereo jack) x 1	

^{*1} UV²A stands for Ultraviolet-induced Multi-domain Vertical Alignment, a photo-alignment technology that ensures uniform alignment of liquid crystal molecules. ^{*2} Brightness depends on input mode and other picture settings. Brightness level will decrease slightly over the lifetime of the product. Due to the physical limitations of the equipment, it is not possible to maintain a precisely constant level of brightness. ^{*3} Including AG film on the front and AR film on the back. ^{*4} Approximate distance at which the glass panel can withstand the impact of a 500-gram iron ball dropped on its center. ^{*5} D-sub input terminal only. ^{*6} Use a commercially available connection cable for PC and other video connections. ^{*7} Analogue PC, video, and component video are switchable (on bottom interface); use the menu to select. Video and component video connections require conversion cable via mini D-sub 15-pin jack. ^{*8} Requires the bundled RS-232C conversion cable. For command control only.

Dimensions

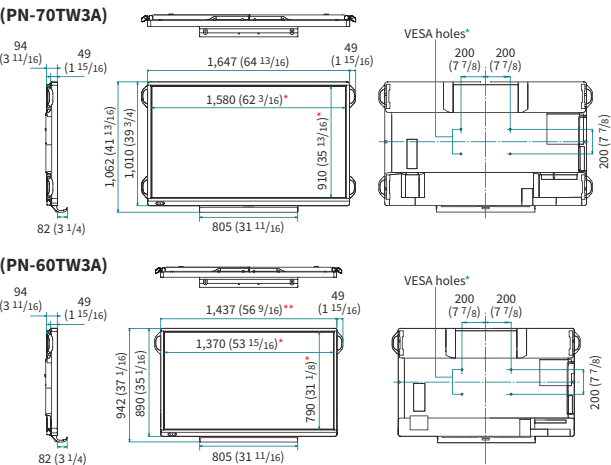

Units: mm (inch)
^{*} Screen dimensions ^{**} When inserted, the wireless adaptor protrudes slightly.
^{*} To use the VESA-standard mounting bracket, use M6 screws that are 8 to 10 mm plus the thickness of the bracket.

Apple, iPhone, iPad, Mac, OS X, and macOS are trademarks of Apple Inc., registered in the US and other countries. Microsoft PowerPoint, Excel, Windows, and OneNote are either registered trademarks or trademarks of Microsoft Corporation in the US and/or other countries. App Store is a service mark of Apple Inc. iOS is a trademark or registered trademark of Cisco in the US and other countries and is used under license. Android and Google Play are trademarks of Google Inc. Intel, Intel Core, and Celeron are trademarks of Intel Corporation in the US and/or other countries. Adobe, Illustrator, and Photoshop, are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries. DisplayPort and the DisplayPort Compliance Logo are trademarks owned by the Video Electronics Standards Association in the US and other countries. The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. All screen images appearing in this brochure are simulated. All other brand names and product names may be trademarks or registered trademarks of their respective owners.

Input/Output Terminals

(Side)

- USB (for wireless adaptor)
- USB*
- LAN port

(Bottom)

- Audio output
- DisplayPort output
- USB (for PC)
- PC analogue input RGB (D-sub)
- PC/AV input (HDMI)
- Audio input
- RS-232C input
- LAN port
- Option terminal
- PC/AV input (HDMI)

* For USB flash driver

Windows® PC System Requirements	
PC	PC/AT compatible machine with USB 2.0 port and screen resolution of 1,920 x 1,080 (CD-ROM drive required for installation)
CPU	Intel® Celeron® B810E 1.6 GHz or higher Intel® Core™ i7-3517UE 1.7 GHz or higher recommended
OS	Windows® 7 (32-bit/64-bit), Windows® 8.1 (32-bit/64-bit), Windows® 10 (32-bit/64-bit)*
Memory	2 GB or more
Hard disk	200 MB or more free space (additional space required for saving data)

^{*} Use in desktop mode

Option

- PN-ZL02A : Touch Pen



Distributed by:

