



LCD DISPLAY

VA3209-MH


Key Features

- SuperClear® IPS panel
- Full HD 1080p resolution
- 3 side borderless bezel
- 75hz Variable Refresh Rate
eliminates screen tearing and reduce
stuttering
- Eye-care technology for comfortable viewing



Product Description

The ViewSonic VA3209-MH is a 32" Full HD monitor featuring HDMI and VGA inputs for business and home use. The optimal screen performance and comfortable viewing without tearing or stuttering is delivered through adaptive sync, eye-care technology, and various ViewMode presets. Simply expand your workspace and experience truly seamless, ergonomic multitasking on just one screen with a VESA-compatible mount at a low power consumption.

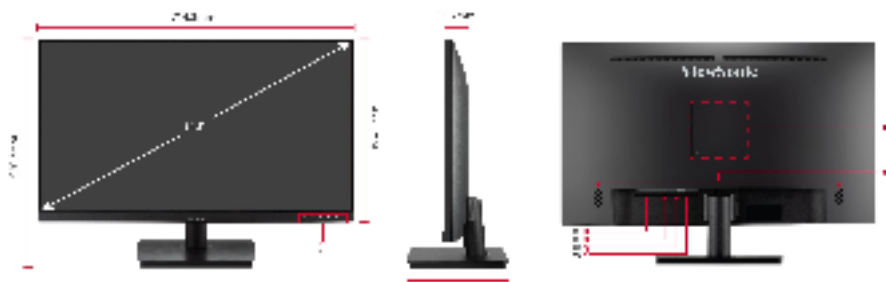

1. Menu Control Panel
2. DC In
3. HDMI
4. VGA
5. Audio Out
6. VSEA Compatible (Wall Mount 100x100mm)

7. Speakers

Visit Us www.viewsonic.com

DISPLAY

Display Size (in.):	32
Viewable Area (in.):	31.5
Panel Type:	IPS Technology
Resolution:	1920 x 1080
Resolution Type:	FHD (Full HD)
Static Contrast Ratio:	1,200:1 (typ)
Dynamic Contrast Ratio:	50M:1
Light Source:	LED
Brightness:	250 cd/m² (typ)
Colors:	16.7M
Color Space Support:	8 bit true
Aspect Ratio:	16:9
Response Time (Typical GTG):	4ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	75
Adaptive Sync:	Yes
Blue Light Filter:	Yes
Flicker-Free:	Yes
Color Gamut:	NTSC: 72% size (Typ) sRGB: 104% size (Typ)
Pixel Size:	0.364 mm (H) x 0.364 mm (V)
Surface Treatment:	Anti-Glare (Semi-Glossy), Hard Coating (2H)

COMPATIBILITY

PC Resolution (max):	1920x1080
Mac® Resolution (max):	1920x1080
PC Operating System:	Windows 10/11 certified; macOS tested
Mac® Resolution (min):	1920x1080

CONNECTOR

VGA:	1
3.5mm Audio Out:	1
HDMI 1.4:	1
Power in:	DC Socket (Center Positive)

AUDIO

Internal Speakers:	2.5Watts x2
--------------------	-------------

POWER

Eco Mode (Conserve):	23W
Eco Mode (optimized):	27W
Consumption (typical):	32W
Consumption (max):	35W
Voltage:	AC 100-240V
Stand-by:	0.5W
Power Supply:	External Power Adaptor

ADDITIONAL HARDWARE

Kensington Lock Slot:	1
-----------------------	---

CONTROLS

Physical Controls:	Key 1 (favorite), Key 2, Key 3, Key 4, Key 5 (power)
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

OPERATING CONDITIONS

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

WALL MOUNT

VESA Compatible:	100 x 100 mm
------------------	--------------

INPUT SIGNAL

Frequency Horizontal:	24 ~ 86KHz
Frequency Vertical:	48 ~ 75Hz

VIDEO INPUT

Digital Sync:	TMDS - HDMI (v1.4)
Analog Sync:	Separate - RGB Analog

ERGONOMICS

Tilt (Forward/Back):	-5° / 20°
----------------------	-----------

WEIGHT (IMPERIAL)

Net (lbs):	16.1
Net Without Stand (lbs):	13.4
Gross (lbs):	20.3

WEIGHT (METRIC)

Net (kg):	7.3
Net Without Stand (kg):	6.1
Gross (kg):	9.2

DIMENSIONS (IMPERIAL) (WXHxD)

Packaging (in.):	30.3 x 20.1 x 4.9
Physical (in.):	28.1 x 20.5 x 9.1
Physical Without Stand (in.):	28.1 x 16.8 x 2.3

DIMENSIONS (METRIC) (WXHxD)

Packaging (mm):	770 x 510 x 125
Physical (mm):	714 x 520 x 231
Physical Without Stand (mm):	714 x 428 x 59

GENERAL

Regulations:	CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, UKCA, BSMI, BIS
PACKAGE CONTENTS:	VA3209-MH x1, HDMI Cable (v2.0; Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
Warranty:	*Warranty offered may differ from market to market