

24" (23.6" viewable) Fast Action 144Hz Gaming Monitor

1ms Response Time for Blazing-Fast Performance



XG2401



Available for this model:
**Privacy Filter
Screen Protector**
VSPF2360
(Sold Separately)

Engineered to exceed e-sports standards, the ViewSonic® XG2401 enables you to respond to threats and dominate the competition like never before with its virtually instantaneous 1ms response time. This 24" (23.6" viewable) monitor features AMD FreeSync™ technology for smooth, tear-free visuals during intense fast-paced action scenes. More than just a speed demon, this monitor ensures your competitive edge with a Game Mode feature and black stabilization functions that deliver heightened visibility and detail so you can see your opponents' every move. With a gamer-inspired ergonomic stand that features an integrated headphone hook and cable management functionality, the XG2401 has all you need to conquer your gaming and entertainment quests.

Key Features:

- 144Hz refresh rate
- Ultra-fast response time
- AMD FreeSync™ technology
- Low input lag for seamless gaming experience
- Black stabilization for ultimate visibility


Designed for:

- Gaming
- Entertainment

24" (23.6" viewable) Fast Action 144Hz Gaming Monitor



XG2401

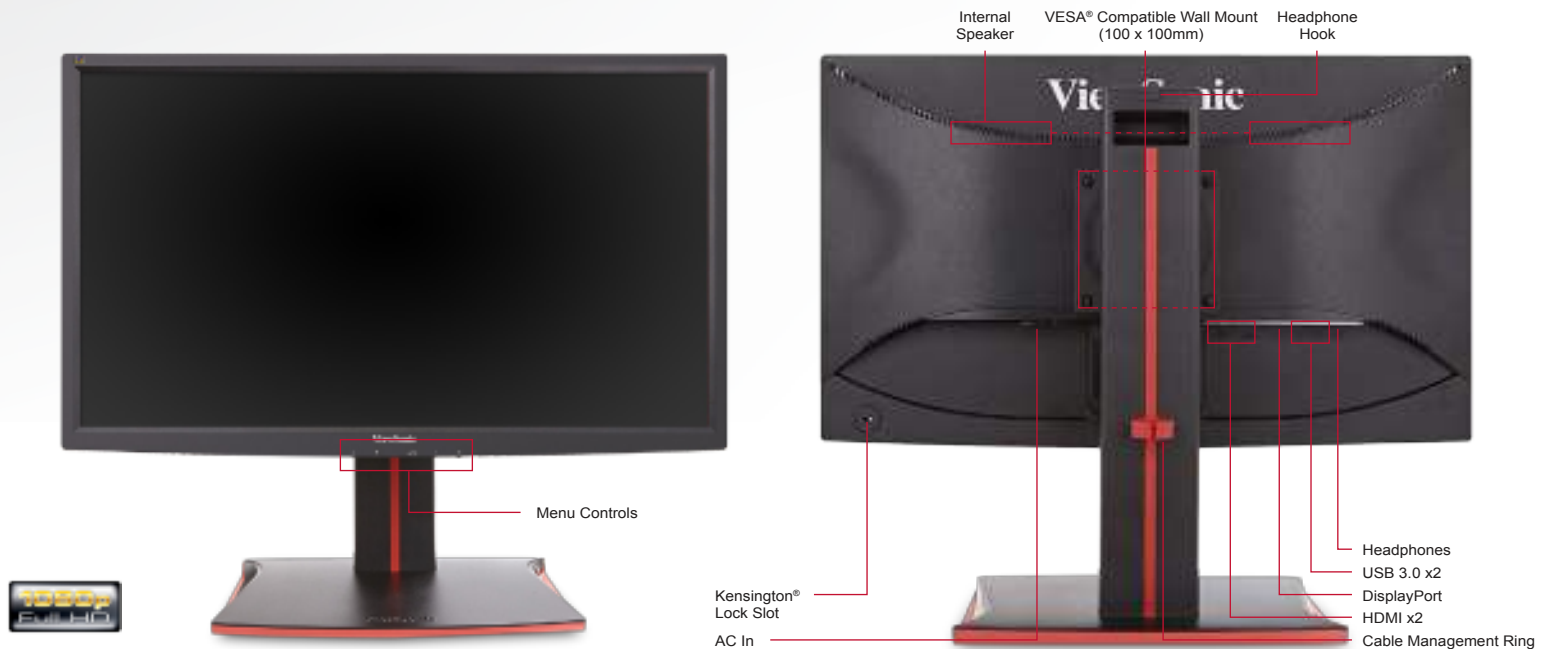

Specifications

| | | | |
|----------------------|--|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LCD PANEL | | Type | TN Type, a-Si TFT Active Matrix LCD |
| | | Display Area | 20.9" horizontal x 17.8" vertical; 23.6" diagonal |
| | | Optimum Resolution | 1920 x 1080 |
| | | Brightness | 350 cd/m ² (typ.) |
| | | Contrast Ratio | 1000:1 (typ.) |
| | | Dynamic Contrast Ratio | 120M:1 |
| | | Viewing Angles | 170° horizontal, 160° vertical |
| | | Colors | 16.7M (6bit + A-FRC) |
| | | Response Time | 1ms (GTG) |
| | | Backlight | White-light LED |
| | | Backlight Life | 30,000 hours (min.) |
| | | Panel Surface | Anti-glare, hard-coating (3H) |
| VIDEO INPUT | | Digital | DisplayPort, HDMI |
| | | Frequency | Fh: 15~180KHz, Fv: 24~144Hz |
| | | Sync | TMDS, PCI-E |
| AUDIO OUTPUT | | Speakers | 2-watt (x2) |
| COMPATIBILITY | | PC | Up to 1920x1080 non-interlaced |
| | | Mac® | Up to 1920x1080 |
| CONNECTOR | | Video In | DisplayPort, HDMI x2 |
| | | Audio Out | 3.5mm mini jack |
| | | USB | 3.0 (x2), Type B upstream |
| | | Power | 3-pin plug (CEE22) |
| CONTROLS | | Front Panel Buttons | 2, Down, Up, 1, Power |
| | | OSD | Contrast/Brightness, Input select, Audio adjust, Color adjust, Information, Manual image adjust, Advanced image adjust, Setup menu, Memory recall (See user guide for complete OSD functionality) |

| | | | |
|-------------------------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|
| ERGONOMICS | | Tilt | Forward 5° / Back 22° |
| | | Swivel | ±175° |
| | | Rotation | 0~90° |
| | | Height Adjust | 0~120mm |
| POWER | | Voltage | AC 100~240V (universal), 50 / 60Hz |
| | | Consumption | 32W (typ.) / 36W (max.) |
| | | Optimize | 25W (typ.) |
| | | Conserve | 20W (typ.) |
| OPERATING CONDITIONS | | Temperature | 32~104° F (0~40° C) |
| | | Humidity | 20~90% (non-condensing) |
| DIMENSIONS (W x H x D) | | Physical with Stand | 22.3 x 17.0 x 9.1 in. / 566 x 432 x 231 mm |
| | | Physical without Stand | 22.3 x 13.5 x 2.0 in. / 566 x 342.6 x 50.9 mm |
| | | Packaging | 25.2 x 16.5 x 5.4 in. / 640 x 420 x 137 mm |
| WEIGHT | | Net with Stand | 14.5 lb. / 6.6 kg |
| | | Net without Stand | 7.6 lb. / 3.5 kg |
| | | Gross | 18.5 lb. / 8.4 kg |
| WALL MOUNT | | VESA compatible | 100 x 100 mm |
| REGULATIONS | | CE EMC, CB, RoHS Green BOM, ErP, REACH SVHC List & DoC, WEEE, US NRTL w/ CA (cULus/cTUVus/cETLus/cBvus), FCC-B w/ICES003, ENERGY STAR 6.0, EPEAT Silver, Mexico-CoC, Mexico Energy, BSMI, PSB, RCM, SASO, KC, E-Standby, VCCI, PSE, CCC, CEL Level 1 | |
| RECYCLE/DISPOSAL | | Please dispose of in accordance with local, state, or federal laws | |
| WARRANTY | | Three-year limited warranty on parts, labor and backlight | |

Optional Accessories

| | |
|------------------------------------------------------------|---------------|
| HDMI to DVI cable 6FT | CB-00008948 |
| Mini DisplayPort to DisplayPort cable 6FT | CB-00010958 |
| DisplayPort to DisplayPort cable 30FT..... | CB-00010684 |
| DisplayPort to DisplayPort cable 6FT | CB-00010555 |
| Display Port Male to VGA Female Adapter (Single Link)..... | CB-00011486 |
| DisplayPort to DVI Adapter..... | LCD-CABLE-001 |
| Desktop Display Wall Mount Kit | LCD-WMK-001 |

What's in the box?

XG2401 monitor, Power cable, DisplayPort cable, USB 3.0 cable, Quick Start Guide, ViewSonic Wizard CD



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.

*AMD FreeSync™ technology with DisplayPort 1.2a connection port. Programs, specifications and availability are subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. AMD, the AMD Arrow logo, FreeSync and combinations thereof are trademarks of Advanced Micro Devices, Inc. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2016 ViewSonic Corporation. All rights reserved. [18322-00B-11/15]

www.viewsonic.com