

65" (64.5" viewable) 10-Point Touch Interactive Commercial Display



Built-in Dual Core ARM CPU and Pre-installed ViewBoard® Software

CDE6561T



For interactive learning in the classroom, or brainstorming in the boardroom, the ViewSonic® CDE6561T is the ideal interactive display solution to increase engagement and collaboration. With astonishing 10-point simultaneous touch capabilities and pre-installed annotation software, this 65" (64.5" viewable) large format display lets multiple users write or draw on the screen with their fingers and styluses. An embedded ARM dual-core processor and Android™ OS provide lightning-fast computing and smooth touch capabilities, ensuring that students and co-workers alike enjoy a responsive screen with each tap, pinch, and swipe. What's more, Flicker-Free technology and a Blue Light Filter help to eliminate eye strain from extended viewing periods. An optional slot-in PC provides additional computing power, while the included ViewBoard for Education software delivers more robust annotation options that make presentations in the classroom even more productive and interactive.

Key Features:


- 10-point multi-touch interactive screen
- Built-in ARM Dual Core CPU with 8GB storage
- Pre-installed ViewBoard Embedded software
- Optional slot-in PC
- Control multiple devices through RS232 or LAN

Designed for:

- Business
- Education

65" (64.5" viewable) 10-Point Touch Interactive Commercial Display

CDE6561T

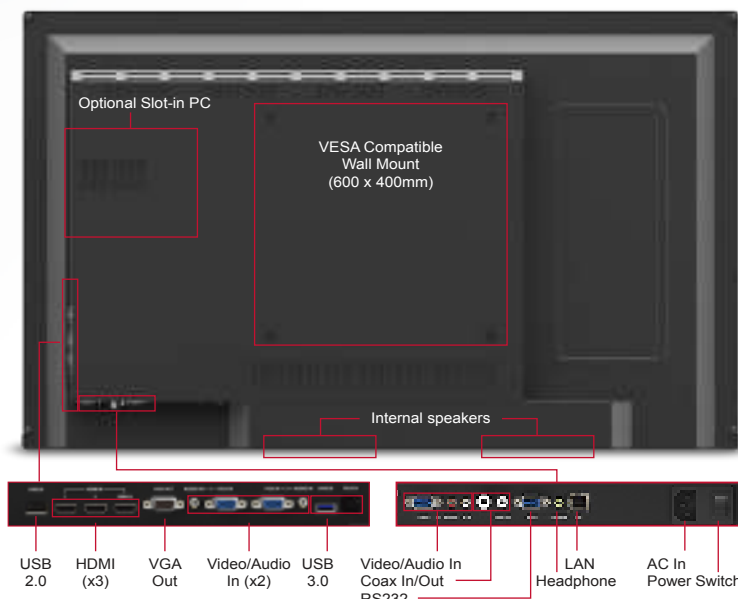

Specifications

PANEL	Type	TFT LCD Module with LED Backlight
	Display Area	56.2" horizontal x 31.6" vertical; 64.5" diagonal
	Optimum Resolution	1920 x 1080
	Contrast Ratio	1400:1 (typ)
	Viewing Angles	178° horizontal, 178° vertical
	Response Time	8ms
	Light Source	Long life, 50,000 hrs. (typ)
	Brightness	350 cd/m ²
	Aspect Ratio	16:9
	Panel Surface	Anti-glare, hard coating 7H scratch resistant
INPUT	Video Input	HDMI, VGA
	Video Output	VGA
AUDIO OUTPUT	Speakers	Internal 10-watt (x2)
	Control Input	RS232
EMBEDDED PLAYER	Android Version	4.2.1
	CPU	ARM Cortex A9 Dual Core CPU
	Memory	1.5 GB
	Storage	8GB
INPUT SIGNAL	Networking	Integrated 10/100/Gigabit
	TV/Video Comp	480i, 480p, 720p, 1080i, 1080p, 4K2K
CONNECTOR	Analog	15-pin mini D-sub (x3), RCA Audio In (x3), headphone out
	Digital	1080p HDMI (x3), CVBS, SPDIF, USB 2.0 (x3), USB 3.0 (x1), LAN, RS232
	Power	3-pin plug

CONTROLS	Panel OSD	Power, Home, Return, Setting, Vol-, Vol+
	Embedded Player	Input, Volume, Backlight, Audio, Screen, Display, Adjust
POWER	Multimedia	Setting, Annotation, Viewboard Embedded, Interface
	Voltage Consumption	Image, Audio, Video
OPERATING CONDITIONS	Temperature	AC 100-240V (universal), 50-60Hz
	Humidity	211W (typ)
DIMENSIONS (W x H x D)	Physical	32-104°F (0-40°C)
	Packaging	20-80% (non-condensing)
WEIGHT	Net	60.0 x 36.4 x 3.9 in. / 1523 x 924 x 98 mm
	Gross	66.8 x 42.2 x 8.7 in. / 1697 x 1071 x 220 mm
WALL MOUNT	Net	100.3 lbs / 45.5 kg
	Gross	125.7 lbs / 57 kg
REGULATIONS	VESA Compatible	600 x 400 mm
RECYCLE/DISPOSAL		FCC, cTUVus, CE, RCM
WARRANTY		Please dispose of in accordance with local, state, or federal laws
		Three-year limited warranty on parts and labor

Optional Accessories

i5 Slot-in PC.....	NMP711-P10
i7 Slot-in PC.....	NMP712-N
The Solstice Pod™ SGE - 4 Users.....	NMP250-WL
The Solstice Pod - Unlimited Users.....	NMP250-WU
Solstice Software™ SGE - 4 Users.....	SW-51*
Solstice Software - Unlimited Users.....	SW-50*
Trolley Cart.....	LB-STND-003
Wall Mount.....	WMK-047

What's in the box?

CDE6561T display, power cable, VGA cable, audio cable, USB cable, RS232 adapter, remote control with batteries, stylus (x3), ViewSonic Wizard CD (User Guide and ViewBoard software)



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.