Dell 27 Gaming Monitor -S2721DGF Dell Display Manager User's Guide





NOTE: A NOTE indicates important information that helps you make better use of your computer.

Copyright © 2020 Dell Inc. or its subsidiaries. All rights reserved. Dell, EMC, and other trademarks are trademarks of Dell Inc. or its subsidiaries. Other trademarks may be trademarks of their respective owners.

2020 - 07

Rev. A00

Contents

Overview
Using the Quick Settings Dialog
Setting Basic Display Functions
Assigning Preset Modes to Applications
Organizing Windows with Easy Arrange
Managing Multiple Video Inputs
Restoring Application Positions
Applying Energy Conservation Features
Other Shortcut Keys13
Attach DDM To Active Window (Only Window 10) 14
Troubleshooting

(D&LL

Overview

Dell Display Manager is a Microsoft Windows application used to manage a display or a group of displays. It enables manual adjustment of the displayed image, assignment of automatic settings, energy management, window organization, image rotation, and other features on selected Dell displays. After installed, Dell Display Manager runs each time the system starts and places its icon in the notification tray. Information about displays connected to the system is available when hovering over the notification-tray icon.



NOTE: Dell Display Manager uses DDC/CI channel to communicate with your display. Ensure that DDC/CI is enabled in the menu as below.

Deel	Dell 27 Gaming Monitor		
g			
÷.			÷
¢			τ τ κ
Ţ			
-			×
☆			
4t			

S2721DGF

DEL

Using the Quick Settings Dialog

Clicking Dell Display Manager's notification tray icon to open the **Quick Settings** dialog box. When more than one supported Dell displays are connected to the computer, a specific target display can be selected using the menu. The **Quick Settings** dialog box enables convenient adjustment of the display's brightness, contrast, resolution, window layout, and so on. You can select **Manual Mode** or **Auto Mode**, and the screen resolution can be changed.

, Diaplay Manager							
2 Autor	3415272138° 👳						
Associations	244161490	thange					
C to the		Carliner					
30 Nanad Parks	Surdard	v					
arghiness:		24%					
Contract:		75%					
×							
		>					
	Opeo tell Opphy Macager						

The **Guick Settings** dialog box also provides access to Dell Display Manager's advanced user interface that is used to adjust basic functions, configure auto mode and access other features.

MOTE:

Feature	Function	Description				
Quick DDM Access	Quick key to call up DDM UI	 Ctrl+Shift+D Use Page Up/Page Down key or click on ">" to flip through all Easy Arrange layouts. 				
	Control individual display in multiple display setup	 From dropdown box to select display, selected display has Dell logo shown. Perform display self-test feature check. Move DDM UI to the display to be controlled. Press Ctrl+Shift+D to bring up the miniUI under the mouse pointer. 				



Setting Basic Display Functions

You can select **Manual Mode** that enables you to manually select a preset mode or select **Auto Mode** that applies a preset mode based on the active application. An onscreen message displays the current preset mode whenever it changes. The selected display's **Brightness** and **Contrast** can also be directly adjusted from the **Basic** tab.

	And the let	Key Javage	Inter Beneger	Determine	
Recolution.	2643-1440				thange
C Auto Mode Dispensional Inte	le avagements for a	the spiloton			Configure
Nerve Noda Characterization	et mades		I	Name	e e
Bild drasse			200.		
Certrade			39%		

NOTE: When multiple Dell displays are connected, select "Enable display matrix control" to apply brightness, contrast and color presets controls to all displays.

Sector	Anto Nation Step Anonger 1	god Manger - Odd	
Naci noti	120.0510440		change
C Auto Mode Lite presect	nade assignments for active epplications		Configure
O Nerud Plot choose a p		standard	v
Right con-		244	
Contracto	🖣	2012	
Di sun est	ie n molitile control		

DELI

Assigning Preset Modes to Applications

The **Auto Mode** tab allows you to associate a specific **Preset Mode** with a specific application, and apply it automatically. When **Auto Mode** is enabled, Dell Display Manager automatically switches to the corresponding **Preset Mode** whenever the associated application is activated. The **Preset Mode** assigned to a particular application may be the same on each connected display, or it can vary from one display to another.

Dell Display Manager is pre-configured for many popular applications. To add a new application to the assignment list, simply drag the application from the desktop, Windows Start Menu, or elsewhere, and drop it onto the current list.

NOTE: Preset Mode assignments for batch files, scripts, loaders, and nonexecutable files such as zip archives or packed files, are not supported.

You can also configure the Game preset mode to be used whenever a Direct3D application runs in full-screen mode. To prevent an application from using mode, assign a different preset mode to it.

Sea.	Jude Mede	Res house	hand Baryage	13 days	
angris prese	tenode to a specific a	polication. To edd	an application, oneg	It to the late	
Application		Pro	sct Maria		^
Octub	(acts cot-lab ref:		a de d	~	
Octob	for Miscreen Direct	D(0)	•••1	~	
📧 Çehek	for universal Window	a appo)		~	
🛃 Adobe R	andar	e .	ankari -	~	
-	Dationer	84		~	


Assigning Preset Modes to Applications

7

DEL


Organizing Windows with Easy Arrange

Easy Arrange helps you to effectively organize your application windows on the desktop. You first choose a pre-defined layout pattern which suits your work, then you just need to drag the application windows into the defined zones. Press ">" or use Page Up/Page Down key to find more layouts. To create a custom layout, arrange the open windows and then click **Save**.

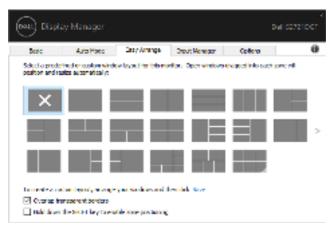

For Windows 10, you can apply different window layouts for each of the virtual desktops.

If you often use Windows snap feature, you can select "**Hold down the SHIFT key to enable zone positioning**". This gives Windows snap priority over **Easy Arrange**. You will then need to press the Shift key to use **Easy Arrange** positioning.

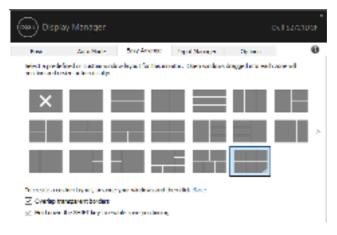



If you are using multiple displays in an array or matrix, **Easy Arrange** layout can be applied across to all the displays as one desktop. Select "**Span multiple displays**" to enable this feature. You need to align your displays properly to make it effective.



There are other advanced ways for the usage of Easy Arrange. Refer to table below.

Feature	Function	Description
Enhanced Easy Arrange	Custom lay- outs	 Save and name 5 customized Easy Arrange patterns. Configure x*y patterns.
	5 MRU (most- recently-used) layouts	 Press Ctrl+Shift+Home to cycle among the last 5 MRU layouts.
	On the fly par- tition resizing	 Hold down Ctrl while resizing current Easy Arrange layout to adjust the size and numbers of cells in a layout. Newly formed Easy Arrange pattern is saved into the Easy Arrange icon position. Hold down Ctrl while clicking on a modified layout icon to restore it to default layout.
	Easy Arrange layouts for portrait mode	 Portrait mode Easy Arrange icons are present- ed when display is rotated.

NOTE: An application may require a minimum effective resolution for its application window. Such application may not fit in an Ease Arrange zone if the zone is smaller than the required window size.

9

Managing Multiple Video Inputs

The **Input Manager** tab provides convenient ways for you to manage multiple video inputs connected to your Dell display. It makes it very easy to switch between inputs while you work with multiple computers.

All video input ports available to your display are listed. You can give each input a name as you like. Please save your changes after editing.

You can define a shortcut key to quickly switch to your favorite input and another shortcut key to quickly switch between two inputs if you often work between them.

lini:	Auto Nade	Harry desarrage	Input Han	YON	Options	
liquit parts	Input	name:				
DP-	(28.8	to edit(
HERE: (AZUM)	(Chie	is rolij				
HDHID	Ox	to editi				
					2010	
investile input draw	tout large					
rone .	20	10103	**		charge active rput.	
hout switch shared	stiene					
-	1.00	NDHO:		000	10402	

You can use the dropdown list to switch to any input source.

line)	Auto Hade	Easy descept	Input Here	QH7	Options	
Separat parts	Input	name:				
00	(cho	to edd				
HOMES (ACTIVA)	(Chit	is rolij				
HERE	Ox	to editi				
Severile input des	a la cal da ca				2016	
Tone		00	**		charge active ry	ы л.
hout which short	other					
Firm		EPHD.			2.8.	

NOTE: DDM communicates with your display even when the display is displaying video from another computer. You can install DDM on the computer you frequently use and control input switching from it. You may also install DDM on other computers connected to the display.



Restoring Application Positions

DDM can help you restore application windows into their positions when you reconnect your computer to the display(s). You can quickly access to this feature by right-clicking on DDM icon in the notification tray.



If you choose "**Auto-restore window layout**", your application windows' positions are tracked and remembered by DDM. DDM automatically puts the application windows into their original positions when you reconnect your computer to your display(s).

	Open Dell Display Manager Attach to active window
	Save current window layout
	Retrop stored window layout
4	Auto restore window kyout
	Online documentation
	Check for resourcing-
	bit

If you want to go back to a favorite layout after you have moved the application windows around, you can first "Save current window layout" and later "Restore saved window layout".

Open Dell Display Vocage: _	
Alla Floradise window	
Some area with the legent	
Record Stated Souther Decision	
Auto restore in network good.	
Online documentation.	
fleddarawarar	
bit	

You may use displays with different models or resolutions in your daily routine, and you may apply different window layouts on them. DDM is able to know the display you have reconnected and restore application positions accordingly.

In case you need to replace a display in a display matrix configuration, you can save the window layout before replacement and restore the layout after a new display is installed.

NOTE: You should keep your applications running in order to benefit from this feature. DDM doesn't launch applications.



Applying Energy Conservation Features

On supported Dell models, an Options tab is available that provides PowerNap energy conservation options. You can choose to set the display's brightness to the minimum level, or to put the display to sleep when the screensaver is activated.



NOTE: The Dark Stabilizer shortcut key is available only when you select FPS game, RTS game, RPG game, SPORTS game, Game1, Game2 or Game3 preset mode.

Date Auto Hode Daty Amongs Double Heringer Options [4] Prevention program Control Control Control (4) Prevention program Control Control Control (4) Prevention program Control Control Control (4) Prevention program Control Control Control (5) Profile charter to a torque Application wonders electrate to que Control Control (5) Profile charter to a torque Control Control Control Control (5) Profile charter to a torque Control Control Control Control (5) Profile charter to a torque Control Control Control Control (5) Profile charter to a torque Control Control Control Control (5) Profile charter Control Control Control Control Control (5) Profile charter Control Control Control Control Control Control Control Control Contro Control Control	🖗 Biqlay Manapa				e sozeina	
(B) Roduct organization when several activation (C) Public duality location when several activation Program that tool keys (Cel + Shift + D) (Cel + Shift + Hum 3) Case Amongo IPRU that cast keys (Cel + Shift + Hum 7)	ase.	Auto Mode	Easy Amongo	ings tilf anager	Quiners	
O Follite charles to store when so consider adjustes Program that to they: Cell + Stitt + 10	Managara	ing line of				Configure
Hogen duritor beys Application worker shortest keys Col + Shift + D Col + Shift + Hum 3 Easy Amarga IRSU chortest keys Col + Shift + Hum 3	(8) Rodus	os briatitados nitrar so	rear sover activates			
Cel + Shit + D Cel + Shit + Hum 3 Cel + Shit + Hum 3 Cel + Shit + Hum 7	ONE	e dialay to step wh	anao conserva activ	witer-		
Oct + Shit + D Oct + Shit + Hum 3 Dary Amerge IPRU thortout land Oct + Shit + Hum 7		an allow a		to be to be a local		
Cary Amarga HRU shortout kayo Cati + Chiti + Hum 7					and the start pro-	
Cel + Shift + Hum 7				No. 1 Section 44		
Dark Stability months but						
		r montava keya				
Hone	Hone					

Deell

Other Shortcut Keys

Shortcut keys can be defined for below operations, you can define the shortcut keys for quick access to perform these operations:

- Program shortcut key: to quickly open the Quick Settings dialog box.
- Easy Arrange MRU shortcut key: to quickly apply the 5 recently used window layouts.
- Application window shortcut key: to launch a quick menu for options under Auto Mode and Easy Arrange.
- **Dark Stabilizer shortcut key:** to quickly improve the visibility in the dark gaming scenarios.


Jack	Auto Mode	Easy Amongo	input Kenager	Options	
M Reading	propriet as				Configure
(B) Redu	os brightness niher s	creative-creative-tax			
ONE	e diatay tastaana	ense enverse atte	elty		
Frequencies	tation		Application worklows	loctor les	
Ctrl + shift			Ctrl + shift + Nun		
Carly Amanga	HRU montout kans				
Ctrl + shift	+ Num 4				
Dark Stabilize	r montaut keys				
Ctrl + shift	+ Num 5				



Attach DDM To Active Window (Only Window 10)

DDM icon can be attached to the active window you are working on. Click on the icon for easy access to below features.

Feature	Function	Description
Attach DDM to Active Window (only Window 10)	Change preset or snap to different partitions	 DDM icon attached to active window and user can eas- ily switch windowposition, change color preset mode, and associate auto preset mode.
	Shortcut key trigger	 On a running app window, press Ctrl+Shift+Ins also triggers the attached DDM menu.
	Move app window among Easy Arrange cells	 Send the app window to previous/next Easy Arrange cell.
	Move app window among displays	• Send the app window to previous/next display.

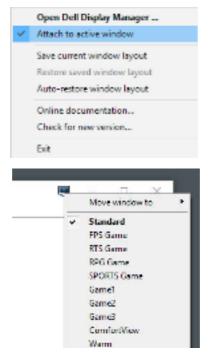


14 | Attach DDM To Active Window (Only Window 10)


DELL

Troubleshooting

If DDM does not work with your display, DDM will show below icon in your notification tray.

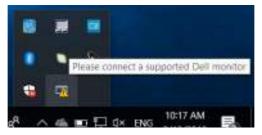

Click on the icon, DDM shows a more detailed error message.

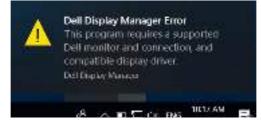

Please note that DDM only works with Dell branded displays. If you are using displays from other manufacturers, DDM doesn't support them.

If DDM is unable to detect and/or communicate with a supported Dell display, please take below actions to troubleshoot:

- 1. Make sure the video cable is properly connected to your display and your computer. especially the connectors should be firmly inserted into position.
- **2.** Check the display OSD to ensure DDC/Cl is enabled.
- **3.** Make sure you have the correct and latest display driver from the graphics vendor (Intel, AMD, NVidia, etc.). Display driver is often the cause of DDM failure.
- **4.** Remove any docking stations or cable extenders or converters between the display and the graphics port. Some low-cost extenders, hubs or converters may not support DDC/CI properly and can fail DDM. Update the driver of such device if the latest version is available.
- 5. Restart your computer.

DEL

DDM may not work with below displays:

- Dell display models earlier than year 2013 and D-series of Dell displays. For more information see www.dell.com/support/monitors.
- Gaming displays using Nvidia-based G-sync technology
- · Virtual and wireless displays do not support DDC/CI
- Some early models of DP 1.2 displays, it may be necessary to disable MST/DP 1.2 using the display OSD

If your PC is connected to the Internet, you will be prompted to upgrade to a newer version of DDM when it is available. It is recommended to download and install the latest DDM application.

You may also check for new version by right clicking on DDM icon while pressing and holding 'shift' key.

	Open Dell Display Manager
	Refresh
	Save monitor asset report
	Save diagnostic report
	Save current window layout
	Restore saved window layout
	Auto-restore window layout
\checkmark	Auto-load at startup
~	Onscreen notifications
	Check for new version
	Exit