# **HANN**spree

## HO 325 PTB 32" Open Frame Touch Monitor

### Experts in **Display**

### **Open Frame Touch Monitor HO 325 PTB**

31.5" / 80cm Diagonal LED Backlight – Format 16:9

- 1920 x 1080 Full HD 1080P Resolution
- 10-Point Touch P-Cap Technology
- 178° / 178° Ultra Wide Viewing Angle
- 400 cd/m<sup>2</sup> High Brightness Panel
- Video Input: HDMI + Display Port
- IP55 (front) Rating Level
- Display Protection: Thickness 3mm
- Built-in Speakers
- ≥7H Toughened Hard Panel Surface
- Slim Profile, Edge-to-Edge True Flat Surface
- Metal chassis, frame and back cover
- VESA Mount and Multiple Mounting Options
- Edge to Edge glass without raised frame
- Orientation: Landscape, Portrait, Face-Up









31.5" / 80 cm

Part. No..: HO 325 PTB

#### SIZE, RESOLUTION



32"

16:9 Aspect Ratio



Full HD 1920 x 1080

#### CONNECTIVITY, IP LEVEL



HDMI DP



IP 55 Water & Dust Protection

#### VIEWING ANGLE, VESA



178 Ultra-Wide Viewing Angle



VESA Mount

#### OTHER FEATURES



10 Point Touch



30.000 Hours Lifetime

### **Display** Solutions




## HO 325 PTB 32" Open Frame Touch Monitor

### Experts in **Display**

Display Size	80 cm / 31.5" Diagonal	
Panel Type	TFT – LED Backlight	
Aspect Ratio	16:9	
Resolution (H x V)	1920 x 1080 Full HD	
Brightness (Typ.)	400cd/m² Panel / 340 cd/m² Monitor	
Contrast (Typ.)	1.200:1 (Typical) / 10.000.000:1 (Active)	
Display Area	698,4 x 392,85 mm	
Viewing Angle L/R; U/D	178° H / 178° V (CR > 10)	
Response Time	8 msec	
Pixel Pitch	0,364 (H) x 0,364 (V) mm	
Touch Type	Projected Capacitive Type – 10 Point Touch Material Glass + Glass (OGS+CG).	
Display Colors	16.7M Colors	
Horizontal Frequency	31 ~ 83 kHz	
Vertical Frequency	56 ~ 75 Hz	
Max Display Frequency	1920 x 1080 @ 60Hz	
Input 1	HDMI	
Input 2	Display Port	
Input 3	USB Type B (Touch)	
Speakers	Yes, 2W x 2, Earphone output	
Power Consumption	On: 40W; Stand-by: 0.257W; Off: 0.235W	
AC Power Range	AC 100 ~ 240 Volt; 50 ~ 60 Hz	
Product Dimensions	747 x 64.3 x 451.4 mm (W x D x H)	
Packing Dimensions	863 x 163 x 577 mm (W x D x H)	
Net / Gross Weight	14,5 Kg / 16,8 Kg	

VESA Mounting	100 x 100 mm. VESA Screws: M6, 10mm (Max), pitch 1 Rear Cover Screws: M4, 10mm (Max), pitch 0.7	
Display Protection	Thickness 3±0.3 mm	
Hardness / Transmittance	≥7H Toughened hard panel surface / ≥86%	
IP Rating Level	IP 55 on surface (Front), Dust and Water Protection *	
Controls	Menu, Up, Down, Bri (+), Vol (-), Input/Return, Power	
LED Backlight life	30.000 hours	
Accessory	EU and UK Power cables; HDMI Cable (1.5m); USB Cable for Touch (1,8m); Quick Start Guide, Warranty Card	
Certifications	CE, RoHS, EU Energy Label	
On Screen Display	15 Languages	
Color	Warm, Nature, Cool, User's Mode	
Preset Mode	PC, Movie, Game, ECO Modes	
Housing	Material: Sheet Metal, Color: Black	
Orientation	Landscape, Portrait, Face-Up	



Supplier's Name	HANNspree
Model Name	HO325PTB
Energy Efficiency Class	А
Screen Size (Centimetres)	80.0
Screen Size (Inches)	31.5
On mode power Consumption (W)	40
Annual Energy Consumption* (kWh)	59
Standby-mode Power Consumption (W)	0,26
Off-mode Power Consumption (W)	0,24
Screen Resolution	1920 x 1080

PART. NO.: HO 325 PTB




<sup>© 2020</sup> HANNSpree Europe Holdings B.V. Specifications and design as well as accessories are subject to change without notice. Screen shots are simulated. Actual products may differ slightly from those illustrated on this promotion material. Please refer to actual samples for final selection. The products displayed on this promotion material may not be available for purchase in your particular country or locality. Please check with your local HANNspree authorized representatives for the availability of specific products in your area. All brand, product, Service names and logos are trademarks and/or registered trademarks of their respective manufactures and Companies.

<sup>\*</sup> IP55: The IP Code classifies how resistant a device is to foreign objects and moisture.

IP55 means that the monitor is protected from dust and can operate in dusty conditions. It is also protected against water jets projected by a nozzle (6.3mm) from any direction.

## HO 325 PTB 32" Open Frame Touch Monitor

Experts in **Display** 

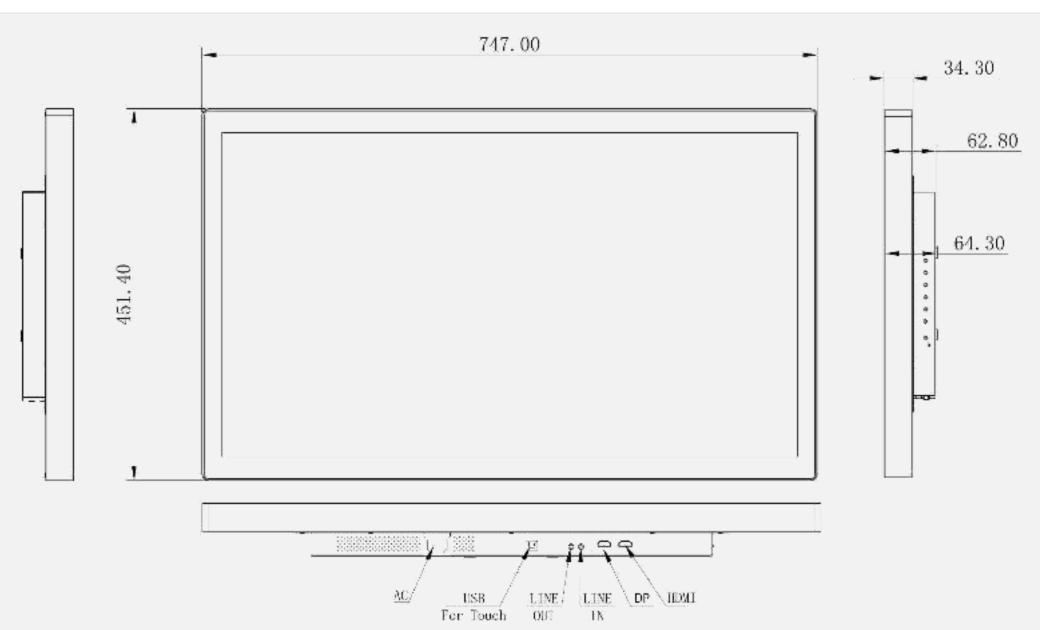

## HO 325 PTB 32" Open Frame Touch Monitor

